


XPJ-1641SR-P

Operation Manual

Operations and Maintenance Methods

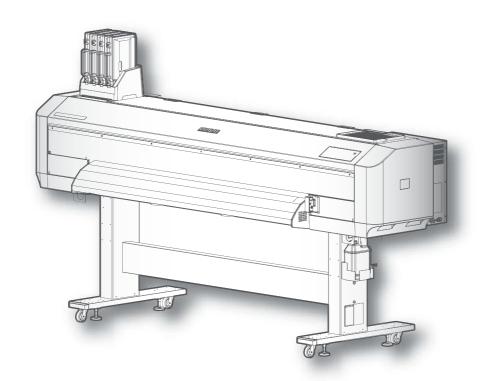

- · Unauthorized copying or duplication of the whole or part of the contents of this manual is prohibited.
- Every care has been taken in writing the contents of this manual, but please contact MUTOH or the dealer you purchased the product from if you find any unclear, erroneous or otherwise unsatisfactory content in the manual.
- Please be aware that MUTOH will not be liable in any way for failures or accidents that result from handling or operating the printer according to any procedures other than those set forth in this manual.
- Company names and product names that appear in this manual are registered trademarks of the respective companies.

For Users in Europe



The CE marking is a mandatory European marking for certain product groups to indicate conformity with the essential health and safety requirements set out in European Directives.

By affixing the CE marking, the manufacturer, his authorized representative, or the person placing the product on the market or putting it into service ensures that the item meets all the essential requirements of all applicable EU directives and that the applicable conformity assessment procedures have been applied.

For Users in the United States

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Installation Location Requirements

This equipment is not suitable for use in locations where children are likely to be present.

Contents

Chapter 1 Basic Operations

	Main components of your printer
	Connecting to a Computer
	System configurations of this product
	Launching/Displaying/Exiting MUTOH Status Monitor (MSM)
	Printing area
	Media size
	Precautions
Pow	ering ON / OFF
	Turning the power ON
	Sleep Mode
	Turning the power OFF
Load	ding a roll media
	Load a roll media into the printer
Noz	zle check and cleaning
	Nozzle check
	Cleaning
Cali	brating your printer
	Print quality calibration
	Media feed adjustment
Adv	anced setting
	Printhead Height
	Swapping left and right edge holders depending on the media type
	Changing holddown pressure using media feed lever
	Canceling or reducing pressure rollers individually
Ope	rating from Front panel
•	Feeding media
	Pausing / Restarting printing
	Canceling printing.
	Starting printing during warming up
	Cutting media
	Menus you can access while printing.
	menus you can access while printing
	² 2 Advanced Operations
TITO	E ANTUINCH ODCIULIOID

	6
Panel setup menu	6
Menu 1: Setup	
Setup 1: User Type	6
·	
·	
·	
·	
·	
, , ,	
•	
•	
•	
•	
•	
-	
•	
•	
·	
•	
•	
·	
•	
·	
•	
	10
•	10
•	al drop sensor unit)
•	
· · · ·	
Menu 2: Test Print	
Test Print 4: Setup List	
Test Print 5: Palette	
Menu 3: Cleaning	
Menu3: Cleaning	
Menu 4: Menu Option	
•	
mena-mena option	

M	enu 5: System Info	110
	Ink Status	110
	Life Times	
M	enu 6: Sleep Mode	112
	Sleep Mode 1: Cleaning Setting	112
	Sleep Mode 2: Auto Sleep Timer	
	Sleep Mode 3: Start	
M	enu 7: Display	114
	Display 1: Language	114
	Display 2: Temperature	114
	Display 3: Length	115
M	enu 8: Job Status	115
M	enu9: Roll Length Manage	116
	Roll Length Manage1: Print	117
	Roll Length Manage2: Simple Print	
	Roll Length Manage3: Scan	
	Roll Length Manage4: Roll Length	
	Roll Length Manage5: Auto Scan	120
	Roll Length Manage6: Auto Print	121
M	enu chart	122
	Setting menu 1	122
	Setting menu 2	123
	Setting menu 3	124
	Menu during printing	125
Chapt	er 3 Maintenance	
M	aintenance	128
Cł	necking ink and replacing ink bag	129
	Checking ink level	129
	When it becomes time to replace ink bag	129
	Replacing ink bag	130
En	nptying waste ink tank	133
	Emptying waste ink tank	133
CI	eaning	135
	Head cleaning	135
	Soak Cleaning	
	Cleaning of cleaning wiper	138
	Cleaning around the capping unit	141

	Cleaning around the print head	143
	Cleaning the color sensor	145
	Inside cleaning	147
R	Replacing consumable parts	148
	Replacing absorption material for the flushing box	148
	Replacing Cutter	150
	Replacing the cleaning wiper	152
M	Moving or transporting the printer	155
	Moving the printer	155
	Transporting the printer	156
	Long-term storage	157
	Performing initial charging after head cleaning	162
Chap	oter 4 Appendix	
M	Messages and Error Messages	166
	Status messages	166
	Error message display and remedies	168
	Error requiring restart	172
Ti	roubleshooting	173
	Installation and initial setup troubleshooting.	173
	Boot-up troubleshooting	174
	Media-related troubleshooting	175
	Printing-related troubleshooting	177
	The media is jammed	180
S	pecifications of this product	183
	List of specifications	183
o	Options / Supply list	186
R	Revision History	187
	,	


Chapter 1 Basic Operations


Introduction	9
Main components of your printer	9
Connecting to a Computer	13
System configurations of this product	15
Launching/Displaying/Exiting MUTOH Status Monitor (MSM)	16
Printing area	18
Media size	18
Precautions	19
Powering ON / OFF	21
Turning the power ON	21
Sleep Mode	
Turning the power OFF	
. ag a poster of the control of the contro	
Loading a roll media	25
Louding a foil media	23
Load a roll media into the printer	25
Nozzle check and cleaning	35
Marada alcada	21
Nozzle checkCleaning	
Cleaning	3/
Calibrating your printer	3.8
Cambrating your printer	
Print quality calibration	38
Media feed adjustment	41
Advanced cotting	4~
Advanced setting	42
Printhead Height	43
Swapping left and right edge holders depending on the media type	
Changing holddown pressure using media feed lever	49
Canceling or reducing pressure rollers individually	
Operating from Front panel	52
Feeding media	52
Pausing / Restarting printing	52
Canceling printing	53
Starting printing during warming up	53
Cutting media	54
Menus you can access while printing	55

Introduction

Main components of your printer

Front side

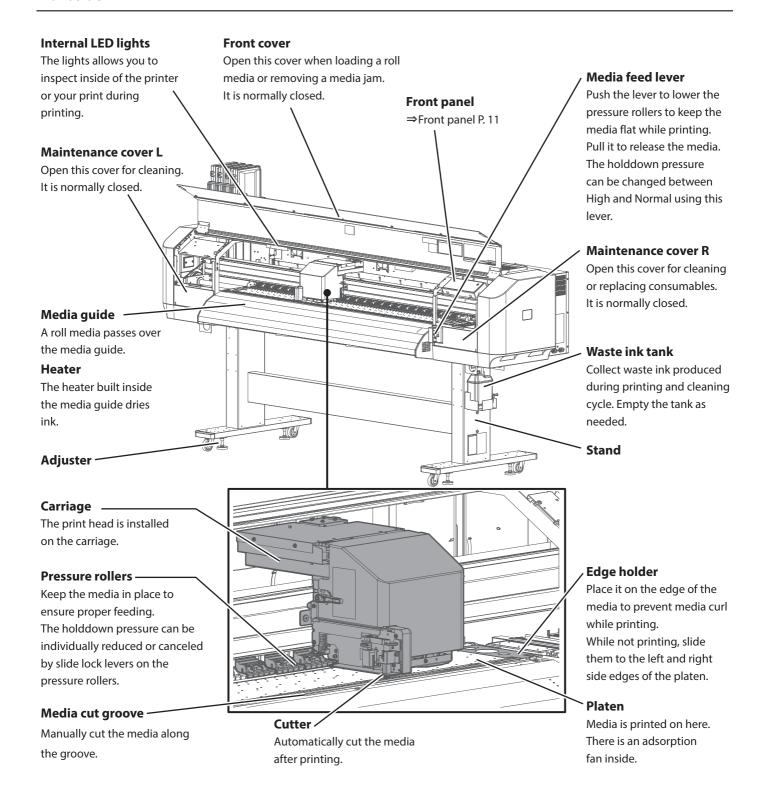


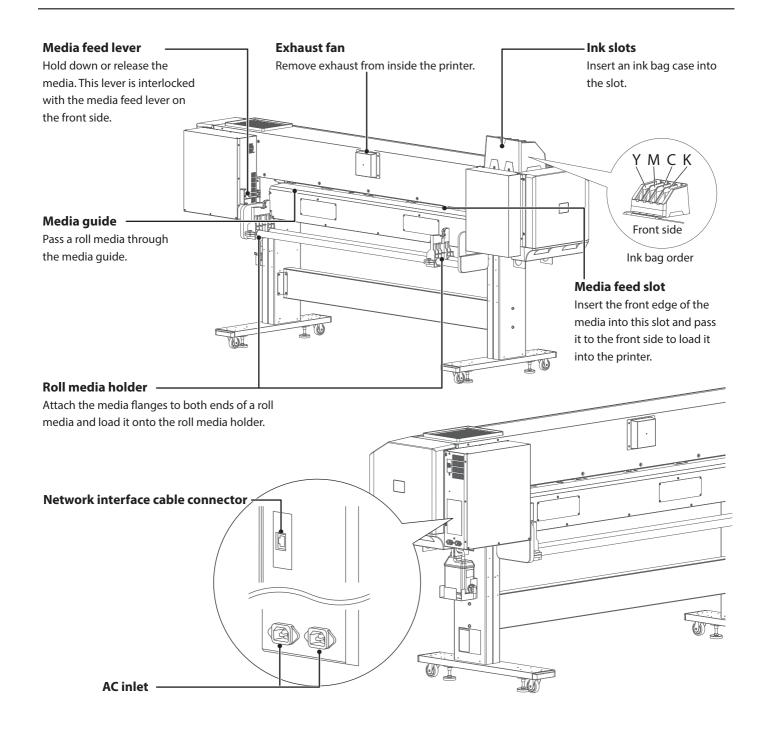

Front panel

The printer has a touch-screen panel located on the front right of the printer. The active keys are lit up on the panel for guidance.

- Tap: Lightly touch the key with your finger, then immediately release.
- Long-touch: Keep touching the key.

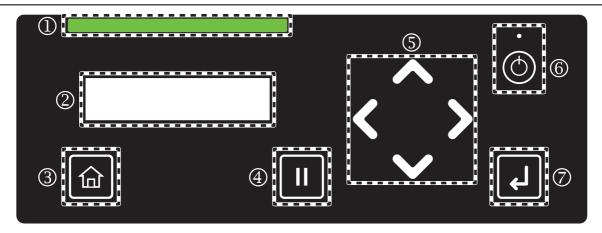

Status Bar

Indicates the printer status by LED light.

- · Working normally: Solid green
- Error/Alert state: Solid red (error) or flash red (alert)

Display Displays the printer status, setting menu, errors and so on.

[Home] key:

Access to or exit the menu.

[Cancel] key:

- Pause the print job. While pausing, tap the key again to resume printing.
- · While the printer is not printing, tap the key to cut the media.
- (Requiring the optional drop sensor unit)
 While the auto nozzle checking, tap the key to cancel the auto nozzle check.

Arrow keys:

When you have entered the setup menu, the arrow keys are used to select a menu or enter a value.

- key: Go to the previous item.
- key: Return to the upper level menu without saving the change.
- key: Go to the sub menu.
- key: Go to the next item.

While the printer is in standby mode, it is used to feed media, run a nozzle check, or perform head cleaning.

- key: Feed the media backward. Long-touch to feed it with high speed.
- Key: Tap to run a nozzle check F.
- key: Tap to perform cleaning.
- Key: Feed the media forward. Long-touch to feed it with high speed.



4











[Power] button:

- Pressing the button for more than 2 seconds while the power is off will turn on the power. The small LED above the button will turn on white.
- Pressing the button for more than 2 seconds while the power is on will put the printer in sleep mode. The small LED above the button remains on white.
- Normally use the setup menu on the control panel to turn off the power. The LED above the power button turns off when the power is off.

Turning the power OFF" P. 24



The (1) symbol means "standby". Even the Power LED turns off, the device still consumes some power unless the power cords are disconnected. This state is referred to as the power being "off" in this Manual.

7



[Enter] key:

Use the Enter key to select a menu or confirm a value.

• While the printer warms up, tap the Enter key to start printing immediately before fully warming

Connecting to a Computer

Important!


Make sure your computer meets the following requirements.

- OS: Windows 11
- CPU: Intel (R) Core (TM) i5 or more
- Memory: 8GB minimum
- Network:


Use a network port that supports Gigabit Ethernet, and an Ethernet cable that supports Category 6 Gigabit Ethernet or later.




- The OS support period of MUTOH software follows the Microsoft support lifecycle policies.
- When using RIP software, please also see the system requirements of your RIP software.
- [1] Connect the Gigabit Ethernet cable to the printer.

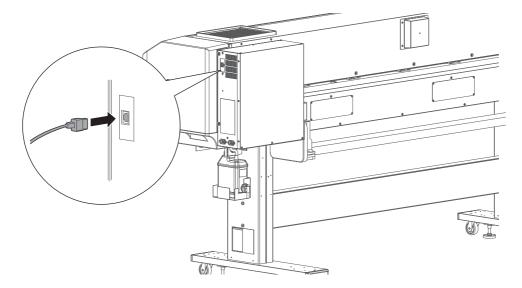


[2] Insert the tip of the cable tie into the hole on the printer to attach it.

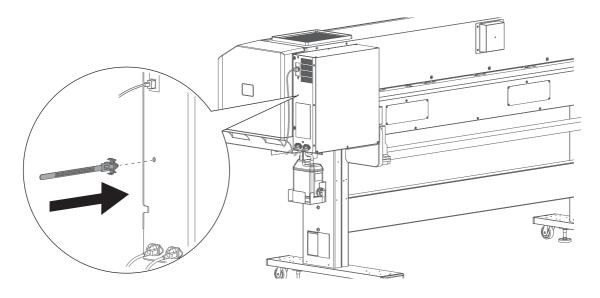

[3] Use the cable tie to secure the Ethernet cable to the printer.

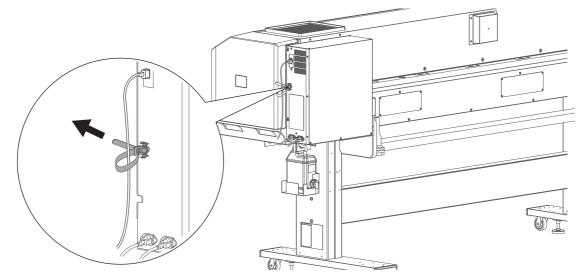




Connect the Gigabit Ethernet cable to the computer.

[5] Use the front panel on the printer to assign the IP address, subnet mask and gateway.



- The illustration above shows the peer-to-peer connection between this product and computer.
- If you are using the LAN connection, make sure that your printer and computer are on the same subnet.

System configurations of this product

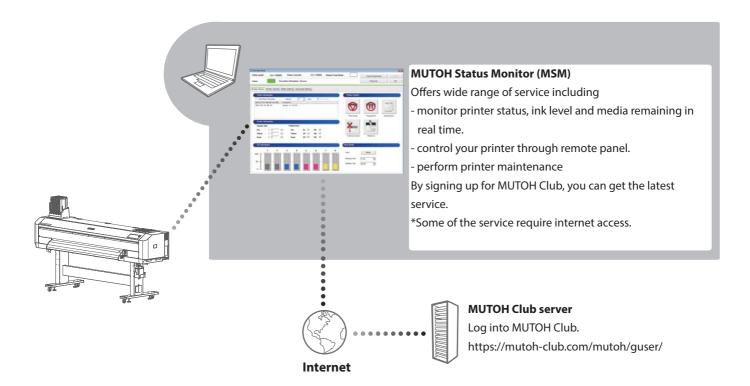

*1 MUTOH Club

By signing up for MUTOH Club, it offers free useful contents including

- download the latest version of application, operation manual
- download media profile
- check printer information (printer information uploaded through MSM can be viewed)

<Print Support Software>

To get the best out of this product, use the MUTOH Status Monitor (MSM). You can download the latest version of MSM from the MUTOH Club Server.

Launching/Displaying/Exiting MUTOH Status Monitor (MSM)

Launching MSM



Windows 11

• Double click the MSM icon on the Desktop.



Launching from the Start Menu of Windows

 $From \ the \ [Start] \ menu, click \ [All \ Programs] \ (or \ [All \ Apps]) - [MUTOH] - [MUTOH \ Status \ Monitor].$

Displaying MSM




Double click the MSM icon in the task tray.

Displaying remote panel

The remote panel allows you to view the printer status or remotely operate your printer.

Click [Remote Panel].

• The remote panel opens.



Exiting MSM




Right click the MSM icon in the task tray, and click [Exit].



While using your printer, do not exit MSM. To close the MSM window, click [Settings] - [Close].

Printing area

Printing is always started from Origin position (print start point) with following margin on all sides of a page as shown here.



a=5 mm *1

b=5 mm to 25 mm *2

c=5 mm

d=5 mm to 25 mm *2

- *1 The value of "a" will be 15 mm in the following cases:
 - · Immediately after media initialization
 - When feeding the media backward by using



The value of "a" will be 40 mm in the following cases:

- When Media Initial menu is set to "Top&Width"
- After cutting the media
- *2 Margin can be changed from the Side Margin menu.

Media size

Media that meet the requirements below can be used on this printer.

Roll media diameter 200 mm maximum

Media core diameter 2 inches: 50 mm to 52 mm

3 inches: 75.5 mm to 79 mm

Weight 30 kg or less

Width 500 mm to 1,625 mm

Recommended media 1.0 mm or less

thickness

Important!

• The default head height is set to "Low1". In the "Low1" setting, media up to 0.3 mm thick can be loaded on the printer.



Contact your local MUTOH dealer about roll media recommended for your printer.

Cautions on handling media

Note the following points when handling the media.

Use the media under an appropriate environment.
 The appropriate temperature and humidity for printing are as follows.

Recommended Printing	Temperature 22 to 30 °C
Environment	Humidity 40 to 60%, No condensation
Change rate	Temperature: No more than 2 °C per 1 hour Humidity: No more than 5% per 1 hour

- Do not use media which is folded, cut, or torn.
- The size of media can change according to changes in humidity in the printing environment.
 Before using media, leave media for 1 hour in the printing environment to adapt it to the environment.
 Performing printing without adapting media to the printing environment may cause media jams due to gaps or wrinkles in the media. Print quality is also affected.
- When using the printer in a low-humidity environment, the cut media may stuck and may not come down. In such a case, open the front cover after the media is cut to remove the media.
- Do not touch the print side.
 Moisture and oil on your hands may affect the print quality.
- Do not leave media set in the printer for a long time.
 Some media has a tendency to bend, causing media jams and degradation of print quality.
 Avoid using such media especially in winter, in dry conditions, and when printing formal documents.
- Do not discard the individual box and bag. Use them for storing media.

Precaution on storing media after use

When storing roll media after use, follow these precautions to avoid print defects caused by cockling.

- After removing your roll media from the scroller, wind it back onto the roll properly and put it in the original plastic bag. Then store it in the package it came in.
- Avoid high temperature, high humidity, and direct sunlight when storing media.
- · Keep the media dry.

Precautions

Please use this product at least once a week

If the printer is not used for a long time, the print head nozzles can get clogged causing damage to the printer.

Please handle ink bag carefully

- Before using an ink bag, make sure to read the Safety Data Sheet (SDS).
- Do not disassemble Ink bag.
 Ink may come into contact with your eyes or skin, causing irritation or allergic reaction.
- Wear protective gloves, glasses, and mask when handling ink bags.

- Avoid contact with your eyes or on your skin.
 If in your eye or on your skin, immediately wash with water.
 It could cause bloodshot eyes or light inflammation. Should any anomalies occur, immediately seek medical attention.
- DO NOT drop or hit an ink bag.
 Ink may leak from the bag.
- Be sure to use the ink before it expires.
 The expired ink should be disposed of as industrial waste. The empty ink bag should be put in a plastic bag and should be disposed of according to the local regulations.
- MUTOH strongly recommends to use genuine ink.
 This printer is designed to bring out the best performance when using with the MUTOH genuine ink.
 Non-MUTOH ink may cause print defects or damage to the printer.

Conduct periodic maintenance

This product requires regular user maintenance.

- Run a nozzle check before and after printing.
 If nozzle missing is found, run a head cleaning.
- Clean the cleaning wiper and around the print head once a week.
- If you are not using the printer for an extended period*, run a head cleaning once a week.
 If you may not be able to perform weekly head cleaning, perform [Longstore] ("Long-term storage" P. 157).
 *"Extended period" means one to four weeks.
- Clean inside of your printer once a month.
- Regularly check the waste ink tank and empty the tank as needed.

Some parts need to be replaced periodically

In this product, there are some parts required to be replaced after a long-term use.


- · User replaceable parts: Absorption material for the flushing box, Cutter, Cleaning wiper
- Parts required to be replaced by service personnel: Motors, Pumps, Print heads

Powering ON / OFF

Turning the power ON

[1] Close the front cover.

[2]



Long press the Power button.

- The Power LED (above the Power button) lights up.
- The printer will start mechanical initialization.



Once the Power LED lights up, release the Power button.

Sleep Mode

This printer must be powered on all the time. While not in use, put it into sleep mode. Putting into sleep mode while not in use will minimize the chance of coagulation of the ink inside the printer. While in sleep mode, the printer performs automatic head

cleaning regularly. The LED above the power button lights up and key operation is invalid except




When you need to turn off the printer for maintenance, operation from the setup menu on the control panel.

Turning the power OFF" P. 24

Start the sleep mode

[1] Ensure that printing is complete and media has been removed.





Press the power button on the control panel for more than two seconds.

• [Please wait] appears.

Sleep Mode
End —> Enter

When the message on the left appears and the printer starts sleep mode.



Sleep mode cannot be entered in the following cases:

- Errors are occurring (Ink End, No Bag, Full Waste Ink Tank, Cover Open, etc.)
- Printer is running (during Media Initial, printing, etc.)

When unable to start sleep mode

• [Clear the error] appears: Clear the error that is being displayed and then put it into sleep mode.

Trook "Error message display and remedies" P. 168

• [Unable to Enter to Sleep Mode] appears: The printer is in operation. After the printer has finished its operation, put it into sleep mode.



If any of the following conditions occur during sleep mode, head cleaning will not be executed (operation will be stopped during head cleaning). When restored to normal conditions, head cleaning will resume.

- · Front cover or maintenance cover is open.
- The pressure rollers are in up position.
- Waste ink tank is full.
- · Ink bag case is removed.
- · Smart chip card is removed.
- · A non-genuine smart chip card is inserted.



• You can also put the printer into sleep mode from the setup menu of the printer control panel. Change the type and interval of automatic head cleaning to be performed during sleep mode from the setup menu of the printer control panel.

☞ "Sleep Mode 1: Cleaning Setting" P. 112

• The printer is automatically put into sleep mode if no printing is performed for certain period. You can change the timer to automatically enter to sleep mode using the setup menu on the control panel, but we suggest to use the default setting 4 hours.

☞ "Sleep Mode 2: Auto Sleep Timer" P. 112


Wake up from sleep mode



Turning the power OFF

Normally use the setup menu on the printer control panel to turn off the printer.

[1] Ensure that printing is complete and media has been removed.

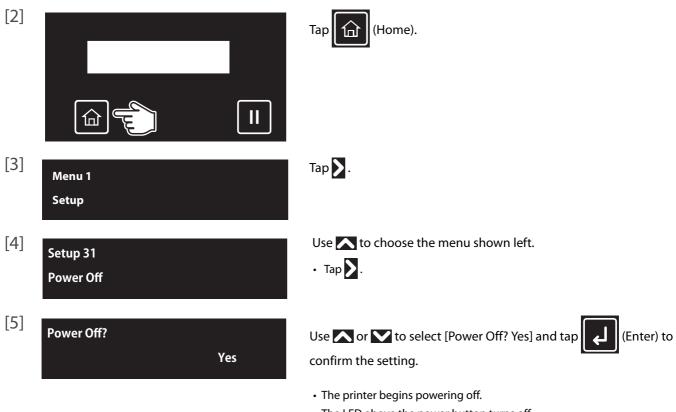

• The LED above the power button turns off.



In the following cases, pressing the power button for more than 2 seconds will power off the printer.

- When an error requiring reboot occurred
- Ink has not been filled in the printer
- During printer activation
- · After the printer firmware has been updated in MSM
- [1] Long press the Power button.
 - The printer will start powering off.
- [2] When [Power Off] appears, release the Power button.
 - The Power LED lights off.

Loading a roll media



Depending on the size of media, two or more people are required.


Load a roll media into the printer

1. Attach flanges to the media

Items Required:

- · Roll media
- Media flange: ×2

[1]




(If you are using 2-inch core roll media) Remove the 3-inch adapters from the media flange.

- ①: Pull two tabs on the adapter outward, then remove it from the flange.
- ②: Pull three tabs on the adapter outward, then remove it from the flange.



- If ${\mathbin{\textcircled{\scriptsize 2}}}$ adaptor cannot be removed, turn the handle on the flange anti-clockwise to loose (see Step 2), then remove it.
- If you are using 3-inch core roll media, skip this step.




(When replacing 2-inch core roll media with 3-inch core roll media) Attach the 3-inch adapters to the media flange.

- ①: Align the tabs (x3) on the adapter with the dents on the base of flange to click into place.
- ②: Align the notches (x4) on the inside of adapter with the protrusions (x4) on the leading edge of media flange as shown to the left to attach it to the edge of the media flange.



• If 2 adapter is misaligned, it will not be properly fixed to the media flange.

[2]



Push the media flange (×2) into the both ends of the media core.

• Before inserting, twist the handle on the flange anticlockwise to unlock it.

Twist the handle clockwise to lock the flange.


[Important!

Check that the flange is firmly locked.


If not, the media can be removed from the flanges, affecting the print quality.

2. Enable torque on media holders

If you want to apply torque to the media holders, follow the steps below.




Twist the knob bolt on the right side of the media holder anticlockwise to loosen.




Twist the knob bolt on the left side of the media holder anticlockwise to loosen.

[3] Slide both left and right media holders about 30 cm towards the center of the slider for easy access.

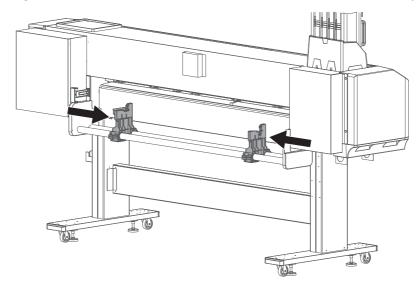


[4] Tighten the knob bolts on both media holders.

[5]




(When looking from the rear side of the printer) Use the screwdriver to loosen four screws securing the roller shaft guide plate to the right media holder.

[6]



Slide up the roller shaft guide plate as far as it will go and tighten the screws.


[7]



Do the same for the left media holder to slide up the roller shaft guide plate as far as it will go and tighten the screws.

- [8] Loosen the knob bolts and slide back both media holders to the original position.
- [9] Tighten the knob bolts.

3. Place the media onto the media holder




Twist the knob bolt on the right side of the media holder anticlockwise to loosen.

- Place the roll media onto the left media holder. Carefully and gently place it on the holder. [2]
 - Place the flange between the roller shaft guide plate and the media holder as shown in the illustration.




Do not drop or apply excessive impact while placing the media. This will cause damage to the part.

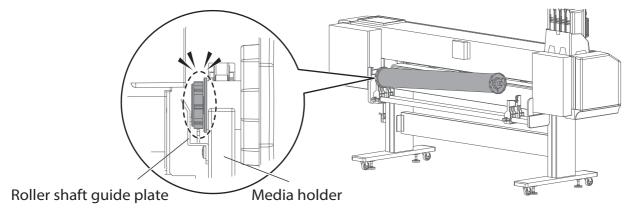

If you set the torque, continue to check the following.

- ①: When looking from the left side, check that the protrusion on the roller shaft guide plate is fitted into between two protrusions on the flange end cap.
- ②: When looking from the rear side of the printer, check that the flange end cap is properly placed on the protrusion on the roller shaft guide plate.

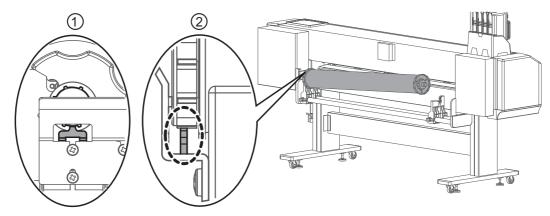




When you adjust the position of the media holder (left), do not move it more than 450 mm away from the left-hand end. The printer will not be able to detect media.

- [3] Place the roll media onto the right media holder. Carefully and gently place it on the holder.
 - Slide the right side of the media holder to place the right side of the flange onto the holder.
 - Place the flange between the roller shaft guide plate and the media holder as shown in the illustration.


| Important!


• Do not drop or apply excessive impact while placing the media. This will cause damage to the part.

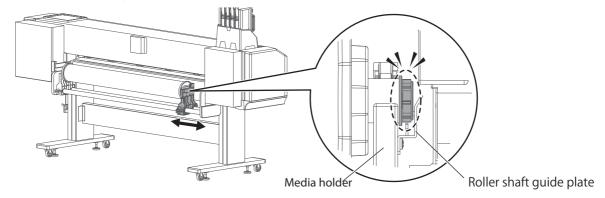

If you set the torque, continue to check the following.

- ①: When looking from the right side, check that the protrusion on the roller shaft guide plate is fitted into between two protrusions on the flange end cap.
- ②: When looking from the rear side of the printer, check that the flange end cap is properly placed on the protrusion on the roller shaft guide plate.

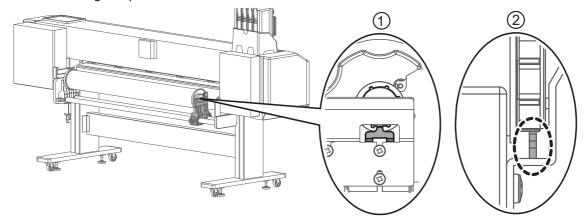





Twist the knob bolt on the right side of the media holder clockwise to tighten.

4. Load the media into the printer

[1] Check that the printer is powered on.



From the front side of the printer, pull the media feed lever towards you as much as possible to release the pressure rollers.



You can access to the media feed lever from the rear side of the printer.


- To release the pressure rollers, push the media feed lever.
- To lock the pressure rollers, pull it towards you.



Using this lever, the holddown pressure can be changed between High and Normal. To apply high pressure, pull the lever towards you as much as possible.


"Changing holddown pressure using media feed lever" P. 49

[3]



Open the front cover.






From the rear side of the printer, insert the front edge of the media into the media slot.




Before inserting, rewind the media properly.

[5]



From the front side of the printer, pull the media for approximately 1 m.


[6] While one person holds the front edge of the media, the other person turns the flange to slightly rewind the media onto the roll to remove warp or skew.

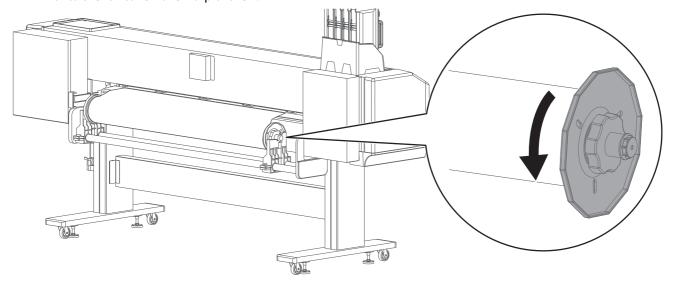



If you remove your hands from the front edge of the media while rewinding, the media can be removed from the media slot.

[7] Check that the right-hand edge of the media is located at the left side of the media guide line. If not, print quality can be affected.

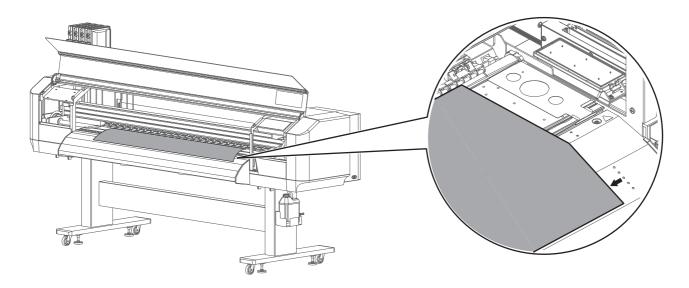


- [8] If needed, use a slide lock lever on the pressure rollers to individually cancel or reduce the holddown pressure.
 - **☞** "Canceling or reducing pressure rollers individually" P. 50



Normally you do not need to adjust the holddown pressure by the slide lock levers.

To print on thin or soft media, individually reduce the holddown pressure.

5. After loading the media...




From the front side of the printer, push the media feed lever to hold the media flat with pressure rollers.



Using this lever, the holddown pressure can be changed between High and Normal. Normally push the lever until it clicks to apply normal pressure.


Thanging holddown pressure using media feed lever" P. 49

- [2] Check that the pressure rollers hold down the both edges of the media properly.
 - If it holds as a "No Good" example, pull the media feed lever towards you as much as possible, then adjust the position of the left or right side of the media holder until the both edges of the media are held down properly (see "Load the media into the printer" P. 30 for more details).

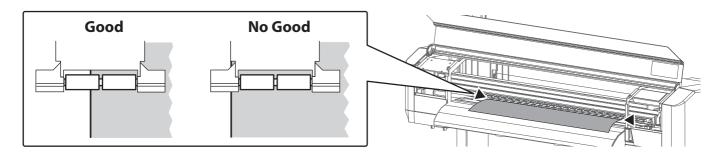

- [3] Place the edge holders on both edges of the media.
 - Lift up the tab on the front of edge holder so that the center of edge holder is lifted.

 Move and place it on the edge of the media while the center of the edge holder is lifted.

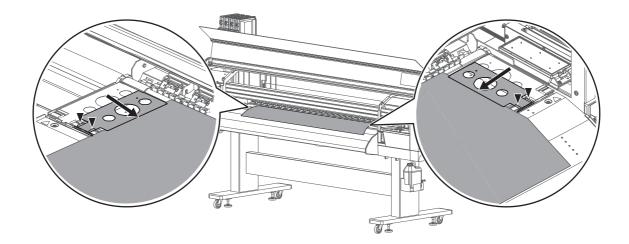



The way to attach edge holders varies depending on type of roll media to be loaded.

"Swapping left and right edge holders depending on the media type" P. 48

• Normally attach them as shown in the figure below so that the hole on the edge holder is located on the outside of the holder. This will hold down roll media lightly.




• To print on thin or soft media, swap left and right edge holders and attach them as shown in the figure below so that the hole on the edge holder is located on the inside of the holder.

This will hold down wider area on roll media.



[Important!

In the default setting, the printer starts printing with 5 mm margin on the sides. Set the side margin to 10mm or more according to the following procedure because the overlapping part of the edge holder and media may be stained with ink.

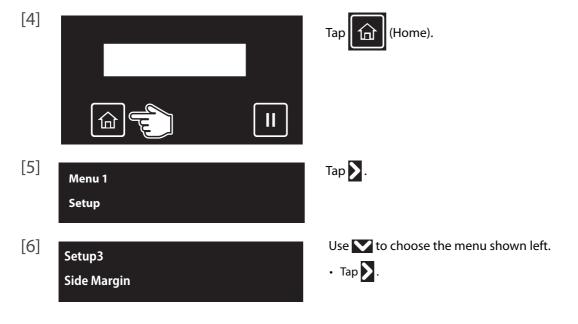


[7] Side Margin: (5 - 25) 10 mm

Enter the side margin. At least 10 mm margin is required.

- Use or to enter the value.
- Tap (Enter) to confirm the setting.



The side margin can be set between 5 mm and 25 mm.



Close the front cover.



Tap (Home).



"User: Type** OK?" appears on the touch panel.

• Use or to choose the correct user type and tap (Enter) to start media initialization.

End the media loading.

Nozzle check and cleaning


Before you start daily printer operation, run a nozzle check. If nozzle missing is found, perform cleaning. This printer offers the following 3 kinds of nozzle checks:

- Nozzle Check: Print a nozzle check pattern selected from " Setup 29: Select Nozzle".
 - **™** "Nozzle check steps" P. 36
- Nozzle Check F: Print a nozzle check pattern using all of the nozzles on the print head.
 - "Nozzle check F steps" P. 35
- Auto Nozzle Check (Requiring the optional drop sensor unit):
 Using the built-in drop sensor, the printer runs an automatic nozzle check regularly without consuming your media.
 If any nozzle clogs were detected, it will perform an automatic cleaning and will continue printing or will automatically select a nozzle segment that works properly to continue printing.
 - "Setup 30: Auto Nozzle Check (Requiring the optional drop sensor unit)" P. 102, Drop Sensor Unit Operation Manual

Nozzle check

Nozzle check F steps


- [1] Load a roll media for Nozzle check.
 - "Loading a roll media" P. 25

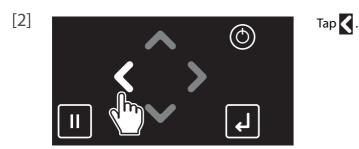

Nozzle Check F
Start -> Enter




- The printer will print the nozzle check pattern.
- [4] Check the nozzle check print to see all nozzles are clear.
 - If you find missing or thin lines on the print, go to "Cleaning steps" P. 37.
 - If all lines are clearly printed, you can start printing.






• The printer information (date and time printed, printer's serial number, firmware version) is printed on the nozzle check pattern.

- [1] Load a roll media for Nozzle check.
 - "Loading a roll media" P. 25

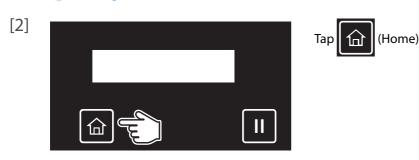

- [3]
 Menu 2
 Test Print
- Use to choose the menu shown left.
- Тар
- [4] Test Print1 Nozzle Check
- · Tap (Enter).
- [5] Check the nozzle check print to see all nozzles are clear.
 - If you find missing or thin lines on the print, go to "Cleaning steps" P. 37.
 - If all lines are clearly printed, you can start printing.





- The pattern shown above is an example when "Select Nozzle" is set to "Nozzle All".
- For details of "Select Nozzle", see "Setup 29: Select Nozzle" P. 100.
- The printer information (date and time printed, printer's serial number, firmware version, Select Nozzle setting) is printed on the nozzle check pattern.

Cleaning

Cleaning steps

Тар 🔰 .

Clean Print Head?

Clean Print Head?

Normal

Clean Print Head?

Long

Use or to choose the cleaning mode.



• The printer will start cleaning.

[3] Run a nozzle check again.



• If the problem persists, repeat normal cleaning until all nozzles are clear. See "Head cleaning" P. 135 for the cleaning mode.



If "Long" or "Little Charge" cleaning does not help to recover the nozzles, go to "Setup 29: Select Nozzle" P. 100 to select the nozzles that fire properly.

Calibrating your printer

Before printing an image on your printer for the first time, follow these steps to calibrate your printer to ensure accurate print quality.

Print quality calibration

This menu calibrates the dot placement of bidirectional printing. Print the alignment pattern to see if dot placement is perfectly aligned. If misaligned, enter the alignment value to correct the accuracy of dot placement.

You can choose one of the following methods:

** : Adjust Print 1

** : Adjust Print 2

Standard

**: Adjust Print 3

Perform the automatic adjustment using the embedded color sensor. Allows you to adjust also a print mode other than the print mode used by the current user definition.

This method optimizes print quality even if the print mode on the RIP side is different from the user-defined mode.

The Standard option performs dot placement alignment for the print mode saved in the currently selected user type.

When you use this option, make sure that the resolution, number of pass, and printing direction of the print mode on your RIP is the same as the print mode saved in the user type currently selected.

Allows you to adjust also a print mode other than the print mode used by the current user definition.


This method optimizes print quality even if the print mode on the RIP side is different from the user-defined mode.



Custom

- If you are suffering from print quality defects after changing installation site or a roll media loaded on the printer, perform the print quality
- If you change the user type after performing the Standard calibration, you need to perform the print quality calibration for the print mode chosen.
- · Since all print modes are adjusted at once after performing Custom adjust print, adjust print is not required even after changing the print mode. When specifying a print mode for RIP software, etc, that is different from the mode set in the user type setting, perform Custom head adjustment and check all patterns, and then adjust any patterns that are misaligned beforehand.

Print quality calibration steps

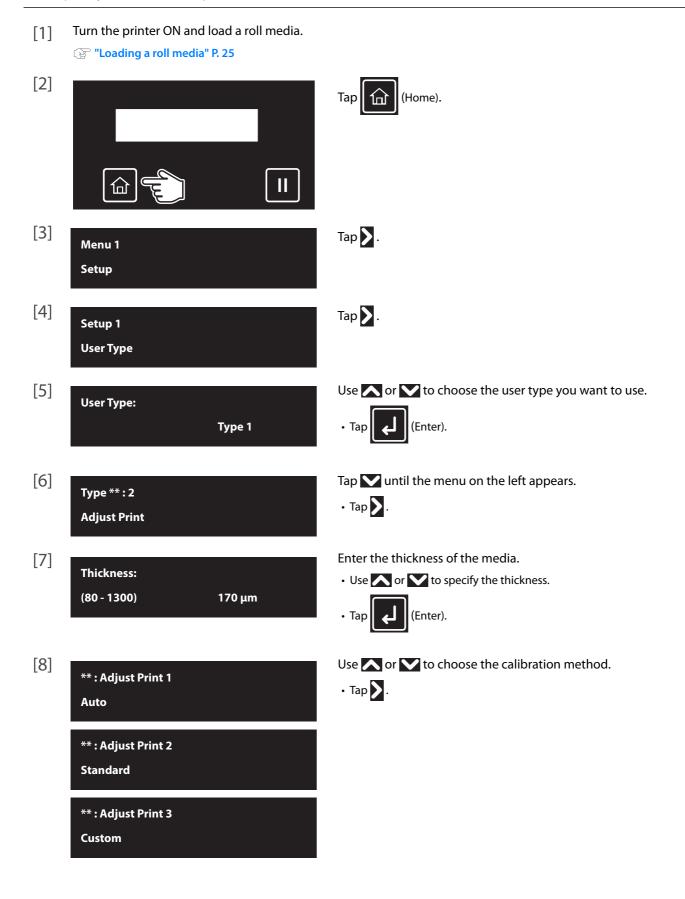



• In Standard print quality adjustment and Custom print quality adjustment, the names in the available patterns are different. For details, refer to the page below.

⊘ "Adjust Print 1: Auto" P. 73

"Adjust Print 2: Standard" P. 73

™ "Adjust Print 3: Custom" P. 74

• For a pre-adjustment check, select "Confirm Pattern.". Check the printing results in "Confirm Pattern.",

- To adjust large misalignment, select "Rough Pattern".
- To adjust small misalignment, select "Fine Pattern".
- [9] Follow the steps below and adjust the print quality.

"Auto Adjustment Method" P. 75

☞ "Standard or Custom Adjustment Methods" P. 76

Media feed adjustment

This adjustment must be performed when:

- you use this product for the first time.
- you use a new type of the media.
- you have changed the holddown pressure on the pressure rollers.


Other than above cases, move to "Nozzle check and cleaning" P. 35.



If the following symptom appears on your print, this adjustment may help to solve the problem.

- · Image overlapping.
- Horizontal white lines on the print.

Media feed adjustment steps

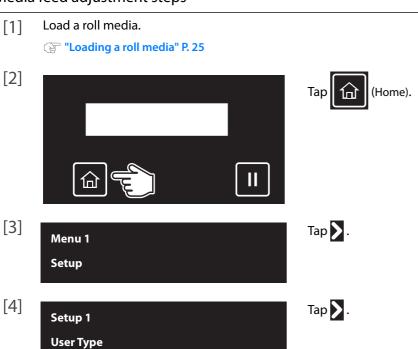







[8] Follow the steps below and adjust the print quality.

™ "Automatic PF adjustment method:" P. 78

Advanced settings

Change your printer settings according to the type or condition of a roll media being loaded.

- If you get a head strike and ink smears on the media
 - Printhead Height" P. 43
- · To print on thin or soft media
 - **™** "Swapping left and right edge holders depending on the media type" P. 48
 - "Changing holddown pressure using media feed lever" P. 49
 - **"Canceling or reducing pressure rollers individually" P. 50**



• When printing on thin media or media without stiffness, wrinkles can be prevented by turning down the vacuum fan.

№ ">7: Vacuum Fan" P. 84**

Printhead Height

Normally choose the "Low1" or "Low2" head height option depending on the thickness of your media. The closer the gap between the media and the printhead, the better the consistency of the print quality.



Depending on the condition of a roll media or media cockling caused by the printer settings, you may get a head strike causing ink smears on the media. In such cases, try followings:

- Lower the temperature set for the preheater and the platen heater.
 - "Setup 1: User Type" P. 69 > "**>4: Pre Heater" P. 83, "**>5: Platen Heater" P. 83
- Reduce or cancel the pressure on the individual pressure rollers holding down the area where the cockling occurs.
 - **"Canceling or reducing pressure rollers individually" P. 50**


See the table below for the relationship between the head height and the recommended media thickness.

Avoid using higher head height unless absolutely necessary, as the wider head gap will cause ink mist to adhere to the printhead nozzles, media or inside of the printer, adversely affecting print quality or leading to damage to the printer parts.

Head height	Recommended media thickness (1.0 mm or less)	Maximum media thickness that printer can feed	Description
Low1	0.3 mm or below	0.3 mm	Normally use this head height.
Low2	0.3 mm to 0.8 mm	0.8 mm	Use this option for media between 0.3 mm to 0.8 mm thick or when the head strikes occurs with Low1 setting.
Middle	0.8 mm to 1.0 mm	1.3 mm	Use this option for media between 0.8 mm to 1.0 mm thick or when the head strikes occurs with Low2 setting.
High	-	2.8 mm	Avoid using this option if a head strike does not occur with Middle setting. Because of wide distance between the print head and media, printing with "High" setting will generate ink mist, causing the following symptoms: Jetting failure due to nozzle missing Ink adhesion to media Ink adhesion to inside of the printer

| Important!

- · After you change the head height, make sure to perform the print quality calibration.
- Do not open Front cover and change the head height during printing. Print quality cannot be guaranteed.
- The type of cleaning wiper to be used varies by head height. When changing the head height, make sure to check the appropriate type of wiper for the selected head height and replace if needed.
- Depending on the head height of the printer, two types of cleaning wipers are available; black and grey. If the head height is set to Low1, Low2 or Middle, use a black wiper (normal type). If set to High, use a grey wiper (for head height High). You will not be able to perform cleaning properly if wrong type is used on the printer.
- This product is shipped with a black wiper attached.






1. Changing the Head Height

[1]

Open the front cover.


[2]



Use the head height adjustment lever (orange) to change the head height.

- High: The highest head height setting.
- Middle: Use this option for media between 0.8 mm to 1.0 mm thick or when the head strikes occurs with Low2 setting.
- Low2: Use this option for media between 0.3 mm to 0.8 mm thick or when the head strikes occurs with Low1 setting.
- Low1: Default head height. The lowest head height setting.

[3]



Close the front cover.


[Important!

If you change the head height from "Low1", "Low2" or "Middle" to "High" and vice versa, change the cleaning wiper to an appropriate type.

- "Replacing with an appropriate cleaning wiper for the head height" P. 46
- [4] Perform print quality calibration.
 - "Print quality calibration" P. 38

2. Replacing with an appropriate cleaning wiper for the head height

- [1] Put the printer into the CR maintenance mode.
 - **"Putting the printer into the CR maintenance mode" P. 138**
- [2] Open the front cover.




Open the maintenance cover on the right side.

[4] Cover the platen with the paper you can get dirty.



Ink may drip from the cleaning wiper.
We recommend covering the floor with paper as well.



Remove the cleaning wiper.

- Slide the hook on the wiper to the back to unhook from the wiper slot.
- · Lift the hook and remove the cleaning wiper.

[Important!

When removing the cleaning wiper, be cautious of ink drops.



Used cleaning wiper should be put in a plastic bag, etc, and dispose of it in compliance with local ordinance and instructions of local authorities.

Attach an appropriate cleaning wiper to the wiper slot.

- $\bullet\,$ Slide the front side of the new cleaning wiper into its slot.
- Press the wiper hook down until it clicks into place.

[Important!

Do NOT touch the cleaning wiper rubber with your bare hand. If finger oil gets on the rubber, it will damage the print head.

[7]

Close the maintenance cover.

[8] Close the front cover.

Start



-> Enter



(Enter).

Tap (Home) to end the cleaning process.

Swapping left and right edge holders depending on the media type

The way to attach edge holders varies depending on type of roll media to be loaded.

To swap left and right edge holders, remove them from the platen, swap left and right, and attach them to the platen again.

• Normally attach them as shown in the figure below so that the hole on the edge holder is located on the outside of the holder. This will hold down roll media lightly.




• To print on thin or soft media, swap left and right edge holders and attach them as shown in the figure below so that the hole on the edge holder is located on the inside of the holder. This will hold down wider area on roll media.



Steps

- [1] Open the front cover.
- [2] Slide both edge holders to the far left along the platen and remove them from the end of the platen.

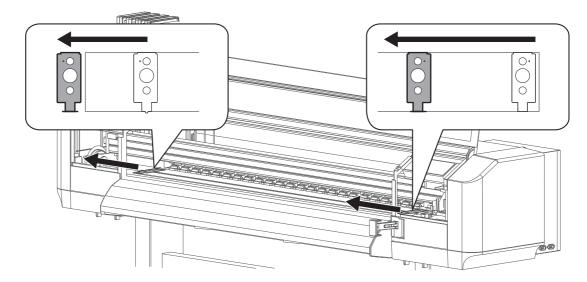

- [3] Swap left and right edge holders and attach them to the platen.
 - Insert the edge holders from the side of maintenance cover L and fit them to the groove on the platen to attach.



If you swapped left and right edge holders, make sure to set the side margin correctly.

The state of the media..." P. 32


☞ "Setup 3: Side Margin" P. 86

Changing holddown pressure using media feed lever

If you want to change the holddown pressure applied across the entire width of media, use the media feed lever.

Depending on the position of the lever, you can choose the pressure between Normal and High.

- Normal: Recommended for typical roll media. To apply normal pressure, push the lever from the front side of the printer until it clicks.
- High: Recommended for heavy weight media (such as Tarpaulin). To apply high pressure, push it as far as it goes.

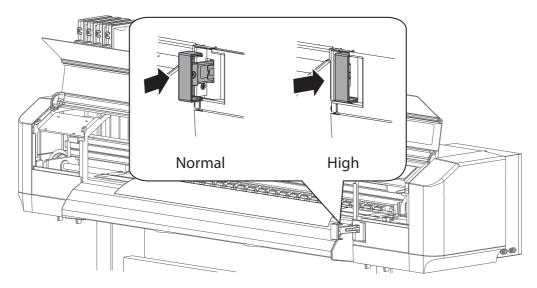

Important!

Every time after you change the holddown pressure by the media feed lever, you must perform the media feed adjustment.

Canceling or reducing pressure rollers individually

When printing on thin media or media without stiffness, the media tends to cockle causing head strikes. By reducing pressure or disabling the pressure rollers individually, it helps to reduce the chance of head strike.

Using the slide lock lever on the individual pressure roller, the holddown pressure can be changed between Normal, Low and Cancel.

- Normal: Recommended for typical roll media. The factory default is set to Normal.
- Low: It reduces the holddown pressure.
- Cancel: It disables the pressure roller.

However, if the media feed lever is set to High, you can only choose between Normal and Cancel (even you set it to Low, the holddown pressure will not be reduced).

To cancel the individual pressure rollers, release the pressure rollers by pulling the media feed lever towards you as much as possible.

Media feed lever	Slide lock lever
Normal	Normal/ Low/ Cancel
High	Normal/ Cancel




Every time after you change the holddown pressure by individual slide lock lever, you must perform the media feed adjustment.



• Thin media or media without stiffness is likely to be wrinkled during printing. Wrinkles can contact the bottom side of the print head causing the media to become dirty. When both edges of the pressurizing rollers of media are released, it can prevent wrinkles.

Procedure

[1] Open the front cover.



(To cancel the individual pressure rollers) From the front side of the printer, pull the media feed lever towards you as much as possible to release the pressure rollers.

(To set the slide lock lever to the Low position) Set the media feed lever to the Normal position.

Thanging holddown pressure using media feed lever P. 49





• You cannot cancel the individual pressure rollers unless you release the pressure rollers by the media feed lever.

- [3] Push down the tab on the slider lock lever, then slide it to the front.
 - To reduce pressure, slide it to front until it clicks.
 - To cancel the pressure roller, fully slide it to the front until it clicks into place.



First, try to reduce or cancel the rollers on both edges of the media. It the problem persists, reduce or cancel more rollers.

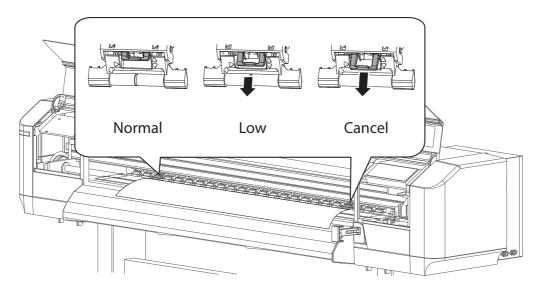




(To cancel the individual pressure rollers) Push the media feed lever back to the original position to lock the pressure rollers.

- [5] Close the front cover.
- [6] Perform media feed adjustment.


™ "Media feed adjustment" P. 41

Operating from Front panel

Feeding media



Check that the pressure rollers hold down the media.



VI

Long-touch or to feed a roll media until it reaches to the desired position.

- key: Feed the media backward.
- key: Feed the media forward.



Long tap the key to feed the media with high speed.

[3] Once it has reached the intended position, release the key.

Pausing / Restarting printing



Tap (Cancel) while printing.

• The printer will pause the job.



- You cannot cancel the job by tapping (Cancel).
- ${\boldsymbol{\cdot}}$ To cancel the job, see the following section.

Canceling printing P. 53

Pausing Print


Cancel Print -> Enter

Tap (Cancel) again to resume printing.




MUTOH cannot guarantee the print quality when you resume the printing.

Canceling printing

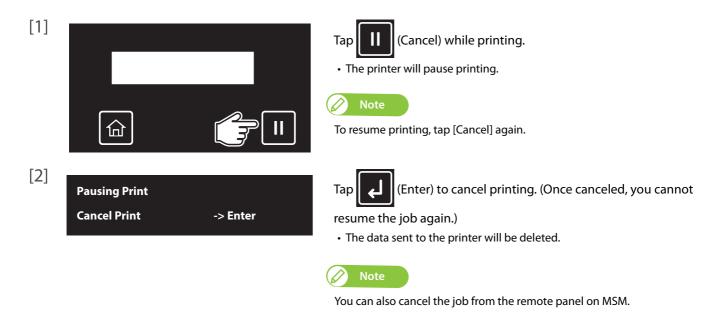

Starting printing during warming up

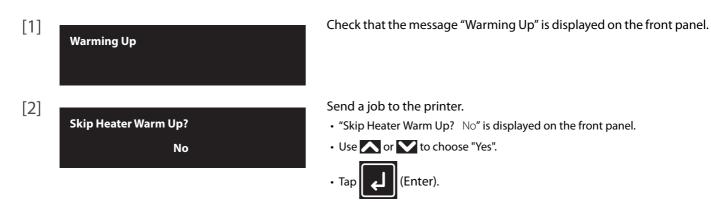

[3] Start printing.





While "Warming Up" is displayed, do not touch the media guide.

You could get burn injuries.




If you start printing during warming up, print quality is not guaranteed.




Even when you start printing during warming up, the printer continues to warm up the heater until it reaches to the specified temperature.

Cutting media



Check that the job has been printed.

• Tap (Cancel).





• The printer will advance the media for the bottom margin and will cut it.




- If the front edge of a new roll media is not straight, cut it before printing.
- When the media detection is set to "Off", the printer does not cut the media automatically.
- When the Output mode menu is set to "Auto Cut", the printer cuts the media automatically after printing.
 - **Setup 6: Output Mode** P. 88
- The cutter blade is consumable parts. Replace it when needed.
- **™** "Replacing Cutter" P. 150

Menus you can access while printing


Backup

Menu 7 **Job Status**

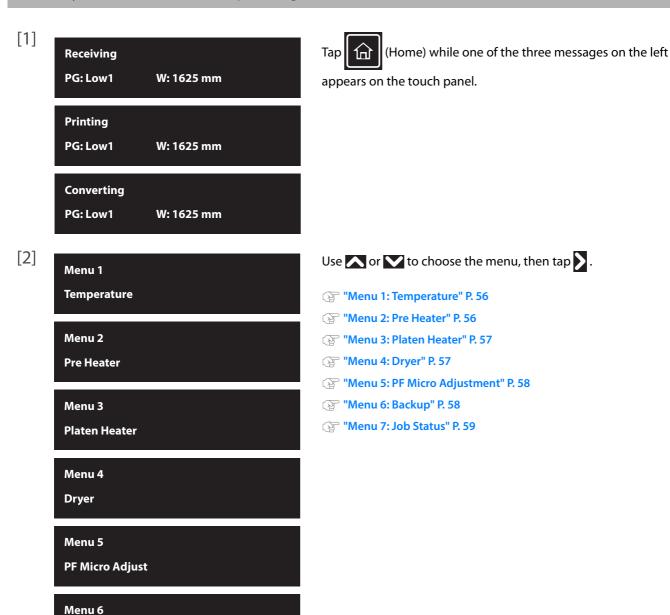

Menu 1: Temperature

You can check the temperature of the heater during printing.

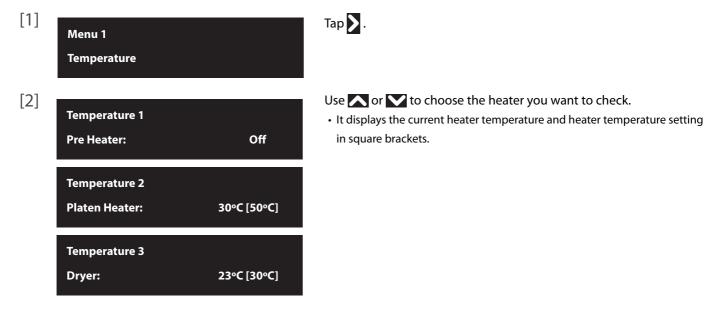




- Indicated temperature is approximate. The accuracy of the temperature is not guaranteed.
- The display of the current temperature blinks all the time even the heater still warms up or has reached the target temperature.

Menu 2: Pre Heater

You can change the pre heater temperature setting for the current print job.

• See the following related sections of Panel Setting Menus:



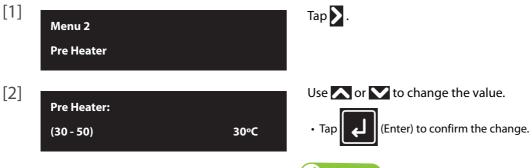



- The change made is applied to the current job only and is not saved in the
- To save the change in the user type currently selected, go to "Menu 6: Backup".






The message "Warming up" appears while the heater is functioning. While "Warming Up" is displayed, do not touch the media guide. You could get burn injuries.

Menu 3: Platen Heater

You can change the platen heater temperature setting for the current print job.

• See the following related sections of Panel Setting Menus:



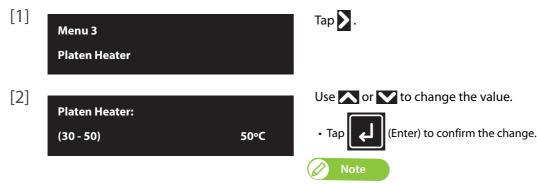

- The change made is applied to the current job only and is not saved in the
- To save the change in the user type currently selected, go to "Menu 6: Backup".






The message "Warming up" appears while the heater is functioning. While "Warming Up" is displayed, do not touch the media guide.

You could get burn injuries.

Menu 4: Dryer

You can change the dryer temperature setting for the current print job.

• See the following related sections of Panel Setting Menus:

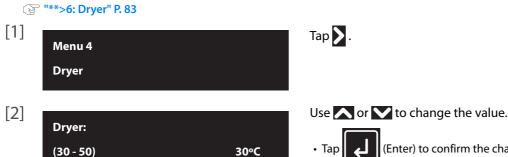

- - (Enter) to confirm the change.



- The change made is applied to the current job only and is not saved in the printer.
- To save the change in the user type currently selected, go to "Menu 6: Backup".






The message "Warming up" appears while the heater is functioning. While "Warming Up" is displayed, do not touch the media guide.

You could get burn injuries.

Menu 5: PF Micro Adjustment

You can change the micro adjustment value to correct media feeding for the currently print job.


• See the following related sections of Panel Setting Menus:

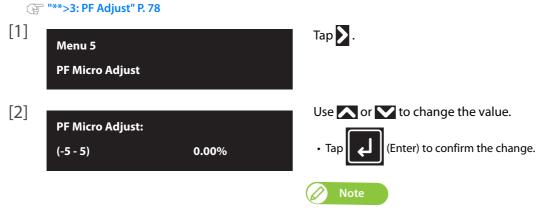

- The change made is applied to the current job only and is not saved in the printer.
- To save the change in the user type currently selected, go to "Menu 4: Backup".

Menu 6: Backup

You can save the change that you made on "Menu2: Pre Heater", "Menu3: Platen Heater", "Menu4: Dryer" and "Menu5: PF Micro Adj." in the currently selected user type.

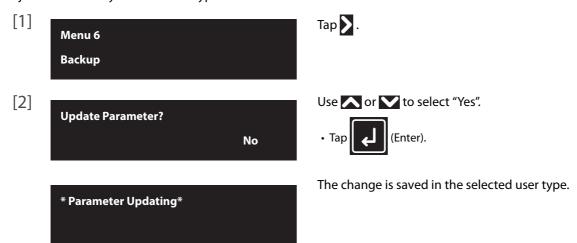


Menu 7: Job Status

You can check the current status of the print job being printed.

• See the following related sections of Panel Setting Menus:

"Menu 8: Job Status" P. 115

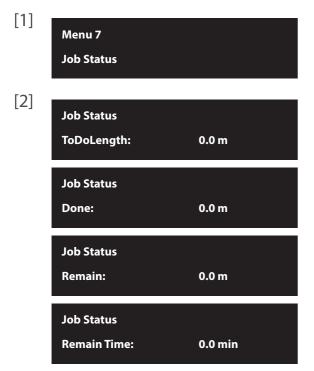



Use or to choose the information you want to check.

- ToDoLength: displays the length of the current job (in media feeding direction).
- Done: displays the length of the current job that has been already printed.
- Remain: displays the remaining length to finish printing.
- Remain time: displays remaining time to finish printing.



- Indicated value is approximate. The accuracy of the value is not guaranteed.
- If the print job data does not contain length information, "0" will be displayed in the Job Status menu.

Chapter 2 Advanced Operations

Intro	duction	63
	Operating the keys to use the menus	6
	Panel setup menu	
Men	u 1: Setup	69
	Setup 1: User Type	69
	Setup 2: Spitting	
	Setup 3: Side Margin	86
	Setup 4: Media Initial	87
	Setup 5: Media Width	87
	Setup 6: Output Mode	88
	Setup 7: Method of Cut	89
	Setup 8: Origin	90
	Setup 9: Prevent Stick menu	9
	Setup 10: Standby Heating	9
	Setup 11: Head Travel	9 ⁻
	Setup 12: Multi Strike	92
	Setup 13: Strike Wait	92
	Setup 14: Slant Check	92
	Setup 15: Auto Cleaning	93
	Setup 16: Exhaust Fan	94
	Setup 17: Longstore	9
	Setup 18: CR Maintenance	9
	Setup 19: Initialization	9
	Setup 20: IP Address	96
	Setup 21: Subnet Mask	96
	Setup 22: Gateway	9
	Setup 23: Header Dump	9
	Setup 24: Heater Control	98
	Setup 25: Start Feed	98
	Setup 26: Alert Buzzer	99
	Setup 27: Internal LED Lights	99
	Setup 28: Front Interlace	100
	Setup 29: Select Nozzle	
	Setup 30: Auto Nozzle Check (Requiring the optional drop sensor unit)	
	Setup 31: Power Off	
	Setup 32: Temporary	
	,	
Men	u 2: Test Print	105
	Test Print 1: Nozzle Check	10
	Test Print 2: Nozzle Check F.	
	Test Print 3: Mode Print.	
	Test Print 4: Setup List	
	Test Print 5: Palette	100
	1 C.3 C. I HILL J. I GIEUE	111


Menu 3: Cleaning	108
Menu3: Cleaning	108
Menu 4: Menu Option	109
Menu4: Menu Option	109
Menu 5: System Info	110
Ink StatusLife Times	
Menu 6: Sleep Mode	112
Sleep Mode 1: Cleaning Setting	112
Menu 7: Display	114
Display 1: Language	114
Menu 8: Job Status	115
Menu9: Roll Length Manage	116
Roll Length Manage1: Print Roll Length Manage2: Simple Print Roll Length Manage3: Scan Roll Length Manage4: Roll Length Roll Length Manage5: Auto Scan Roll Length Manage6: Auto Print	117 118 119
Menu chart	122
Setting menu 1 Setting menu 2 Setting menu 2	123
Setting menu 3	

Introduction

Using the panel setting menus, configure various kinds of settings for the printer.

Operating the keys to use the menus

[1] To access to the setup menu, tap (Home).

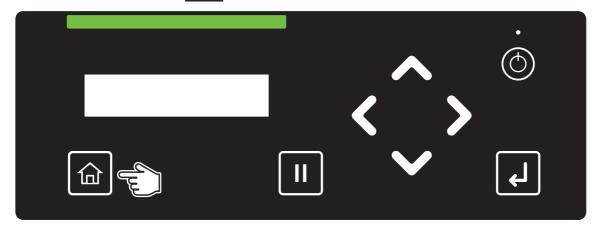




You cannot access to the setup menu while printing or receiving data (the power button is flashing).

[2] Menu 1 Setup Menu 2 **Test Print** Menu 3 Cleaning Menu 9 **Roll Length Manage**

Use or to go to the previous item or next item.

Use to go to the sub menu.

[3]

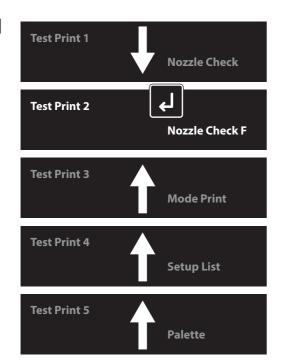

Use or to choose the option from the sub menu or enter the value.

To confirm the value or execute the selected function, tap (Enter).



Use **\(\)** to return to the upper level menu.

(In the example on the left, the display will return to "Menu2: Test Print".)

Panel setup menu

Menu 1: Setup

Configure printer settings. Menu 1 Setup Submenus **⊗** Setup 1: User Type Setup1 User Type Setup 2: Spitting Setup 2 Spitting **Setup 3: Side Margin** Setup 3 Side Margin **⊗** Setup 4: Media Initial Setup 4 **Media Initial ⊗** Setup 5: Media Width Setup 5 Media Width **☞ Setup 6: Output Mode** Setup 6 **Output Mode ☞ Setup 7: Method of Cut** Setup 7 **Method of Cut ⊗** Setup 8: Origin Setup 8 Origin **Setup 9: Prevent Stick menu** Setup 9 **Prevent Stick Setup 10: Standby Heating** Setup 10 Standby Heating **☞ Setup 11: Head Travel** Setup 11 **Head Travel ⊗** Setup 12: Multi Strike Setup 12 Multi Strike **☞ Setup 13: Strike Wait** Setup 13 Strike Wait

> Setup 14 Slant Check

Setup 14: Slant Check

Setup 15 Auto Cleaning	Setup 15: Auto Cleaning
Setup 16 Exhaust Fan	Setup 16: Exhaust Fan
Setup 17 Longstore	⊗ Setup 17: Longstore
Setup 18 CR Maintenance	⊗ Setup 18: CR Maintenance
Setup 19 Initialization	Setup 19: Initialization
Setup 20 IP Address	Setup 20: IP Address
Setup 21 Subnet Mask	Setup 21: Subnet Mask
Setup 22 Gateway	Setup 22: Gateway
Setup 23 Header Dump	⊗ Setup 23: Header Dump
Setup 24 Heater Control	⊗ Setup 24: Heater Control
Setup 25 Start Feed	Setup 25: Start Feed
Setup 26 Alert Buzzer	Setup 26: Alert Buzzer
Setup 27 LED Light	Setup 27: Internal LED Lights
Setup 28 Front Interlace	⊗ Setup 28: Front Interlace
Setup 29 Select Nozzle	Setup 29: Select Nozzle
Setup 30 Auto Nozzle Check	Setup 30: Auto Nozzle Check (Requiring the optional drop sensor unit)
Setup 31 Power Off	Setup 31: Power Off

Menu 2: Test Print



Run a test print to check for nozzle condition, current printer settings, printer configuration, color palette, and print head alignment.

Submenus **Test Print 1: Nozzle Check** Test Print 1 **Nozzle Check Test Print 2: Nozzle Check F** Test Print 2 Nozzle Check F **Test Print 3: Mode Print** Test Print 3 **Mode Print Test Print 4: Setup List** Test Print 4 **Setup List Test Print 5: Palette** Test Print 5 Palette

Menu 3: Cleaning



Perform the print head cleaning and initial ink charging.

Menu 3: Cleaning

Menu 4: Menu Option



Choose to show or hide the menus that are displayed in "Menu 1: Setup".

☞ Menu 4: Menu Option

Menu 5: System Information



Display the system information on your printer.

Menu 5: System Info.

Menu 6: Sleep Mode



Choose the head cleaning mode and timer to be performed before entering to or while in sleep mode.

Submenus

Sleep Mode 1 Cleaning Setting **☞ Sleep Mode 1: Cleaning Setting**

Sleep Mode 2 Start **⊗** Sleep Mode 3: Start

Menu 7: Display



Change the language, and unit of temperature and length displayed on the front panel.

Submenus

Display 1 Language Display 1: Language

Display 2 Temperature **☞ Display 2: Temperature**

Display 3 Length Display 3: Length

Menu 8: Job Status

Menu 8 Job Status Displays the last print job status.

Menu 8: Job Status

Menu 9: Roll Length Manage

Menu 9 Roll Length Manage Specify the remaining roll length settings.

☞ Menu9: Roll Length Manage

Menu 1: Setup

Setup 1: User Type



You can have up to 15 groups of User Type, labeled "Type1" to "Type15". When you select a User Type group ("Type") and tap (Enter), that definition group will be set for the printer. Also, a submenu will be displayed.

Setting values Select a "Type" number, from "Type1" to User Type: "Type15". Type 1



When you change to another User Type, all the settings that can be set via the User Type will be changed.

The following settings can be saved in the user type.

- Settings for "Print Mode", "Effect"
- Adjustment values for "Adjust Print", "PF Adjust"
- Settings for "Pre Heater", "Platen Heater", "Dryer", "Vacuum Fan" and "Thickness"

When using the printer for the first time or using a new roll media, configure a user type settings.

User Type: Type 1 Making media settings.


Submenus **>1: Print Mode Type ** : 1 **Print Mode** **>2: Adjust Print Type ** : 2 **Adjust Print №** **>3: PF Adjust Type ** : 3 PF Adjust **>4: Pre Heater Type ** : 4 Pre Heater **>5: Platen Heater Type ** : 5 **Platen Heater ⊗** **>6: Dryer Type ** : 6 Dryer **>7: Vacuum Fan Type ** : 7 Vacuum Fan **>8: Thickness Type ** : 8 Thickness **>9: Copy User Type Type **: 9 Copy User Type

**>1: Print Mode

Type ** : 1 Print Mode Select a print mode for the media.

• Once selected, the panel displays the effect menu.

Setting values

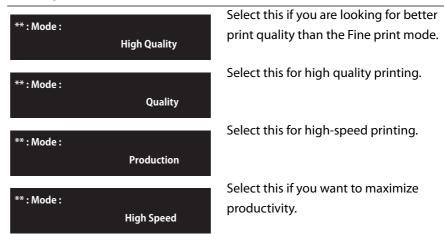

Details of print mode


Print mode	Default effect settings
High Quality	i-Screen
Quality	i-Screen
Production	i-Screen
High Speed	Fine&Fog

Effect



Select an effect setting.

Set up this menu when you want to improve print quality by adjusting the set print mode.

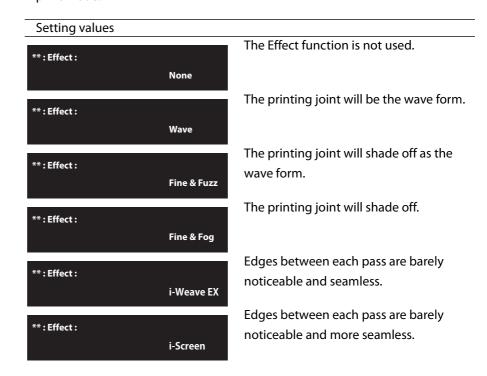

Type **: 2 Adjust Print Sets up when adjusting the printer for the optimum quality of image print. Before adjusting this setting, enter the thickness of the media.

Perform an automatic calibration that the printer automatically prints and scans a pattern with the embedded color sensor to correct dot placement. **: Adjust Print 2 Standard **: Adjusts only the print mode in the user type setting which is currently set. Adjusts the print modes other than the mode in the user type setting which is

currently set.



"Adjust Print" requires at least 550 mm printable width. Before printing, make sure that there is sufficient width on the media. If printable width is less than 550 mm, your printer will not perform printing. Printable width on the media can be adjusted by changing CR origin and side margin (left and right side margin) settings.

"Setup 5: Media Width" P. 87, "Setup 8: Origin" P. 90, "Setup 3: Side Margin" P. 86

Custom


Adjust Print 1: Auto



Perform the automatic adjustment using the embedded color sensor.

Submenus Perform automatic adjustment for all patterns **:Auto1 using the color sensor. ALL Perform automatic adjustment for the **:Auto2 currently selected print mode using the color Standard sensor (calibrate the same print mode as " Adjust Print 2: Standard"). Choose one pattern from the Adjust **: Auto 3 Pattern options for automatic adjustment. Adjust Pattern A

Adjust Print 2: Standard




Adjusts only the print mode in the user type setting which is currently set.



Rough adjustment pattern" P. 77

Fine adjustment pattern" P. 77

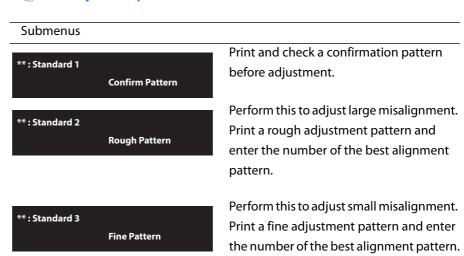


Adjust Print 3: Custom

** : Adjust Print 3 Custom Perform adjustment for all patterns.

⊘ "Confirm pattern" P. 76

™ "Rough adjustment pattern" P. 77

Fine adjustment pattern" P. 77

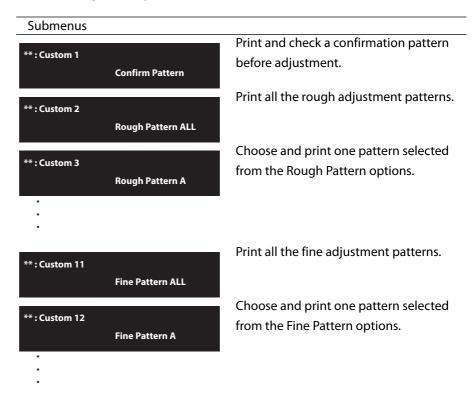

Adjustment patterns for each print mode

Print mode	Adjustment pattern
High Quality	D
Quality	D
Production	D
High Speed	D



If "Head Speed" is set to "Low" in your RIP software, select the adjustment pattern A, B, C or G.

The name of Head Speed menu varies depending on the RIP software you are using.

The menu item number and adjustment pattern options that appear on your operation panel vary depending on the type of ink being used.

Auto Adjustment Method

- **1.** Select the adjustment pattern from "ALL", "Standard", or any specific pattern from Adjust Pattern options.
 - •The selected adjustment pattern is printed.
 - •The printer scans the print using the embedded color sensor, then automatically corrects the dot placement.
- 2. Once successfully completed, the message "Auto Adjust Succeeded End->Enter" will appear on the panel.
 - •If failed, the message "Auto Adjust Failed End -> Enter" will appear on the panel.
 - (Enter) to end the adjustment.
 - •Try Auto Adjust again or perform Standard or Custom adjustment.
- (Enter) to exit the menu.



- If failed in the middle of the calibration, the adjustment value for the pattern which has been successfully calibrated will be saved in the printer, but the adjustment value for the pattern which has been failed to calibrate or has not been calibrated yet will not be saved in the printer.
- Warm up the heater before printing the Confirm and Adjustment patterns. "Skip Heater Warm Up? No" is displayed on the front panel.
- You can start printing while the printer is warming up.
 - **☞** "Starting printing during warming up" P. 53
- If print defects (like banding or grainy look) still appear on the print, try an auto calibration again, or go to "Adjust Print2/ Standard" or "Adjust Print3/ Custom" to perform calibration.
- If a roll media starts to cockle during calibration, load the media again.

CAUTION



While "Warming Up" is displayed, do not touch Media guide.

You could burn yourself.

Standard or Custom Adjustment Methods

- **1.** Print a confirm pattern and check it for printing errors.
- 2. Print "Rough pattern" and look for the best alignment pattern in the printing results.
 - •If you selected " Adjust Print 3: Custom", select "ALL" or one from the Rough Pattern options.
- **3.** Enter the number printed under the best alignment pattern.
- **4.** Print "Fine pattern" and look for the best alignment pattern in the printing results.
 - •If you selected " Adjust Print 3: Custom", select "ALL" or one from the Fine Pattern options.
- **5.** Enter the number printed under the best alignment pattern.



- Warm up the heater before printing the Confirm and Adjustment patterns. "Skip Heater Warm Up? No" is displayed on the front panel.
- · You can start printing while the printer is warming up.

The starting printing during warming up" P. 53







While "Warming Up" is displayed, do not touch Media guide. You could burn yourself.

Confirm pattern


- Tap (Enter) to carry out printing.
- Check the printing results. If there are shifting problems, proceed to rough adjustment pattern printing. In the picture below, there are misalignments.






Rough adjustment pattern

- (Enter) to carry out printing.
- Check the print results and select the number that looks most aligned between 1 and 21.
- Pattern names such as "Pattern D: 11" are shown on the display. Use or to enter the number of the best alignment pattern, and tap (Enter).
- In the case of the picture below, enter "12", so that the display reads "Pattern D: 12".



Fine adjustment pattern

- (Enter) to carry out printing. For the Fine pattern, the same patterns will be printed repeatedly on both sides and center of the media.
- Check the print results on both sides and center of the media and select the number that looks most aligned between 1 and 7.
- Pattern names such as "Pattern D: 4" are shown on the display. Use or to enter the number of the best alignment pattern, and tap (Enter).
- In the case of the picture below, enter "6", so that the display reads "Pattern D: 6".








Type **: 3 PF Adjust Sets up various settings on the Media feed correction.

When the following defects are found in printing results, they may improve by conducting a media feed correction.

- · Images are overlapping.
- There are white lines in images.

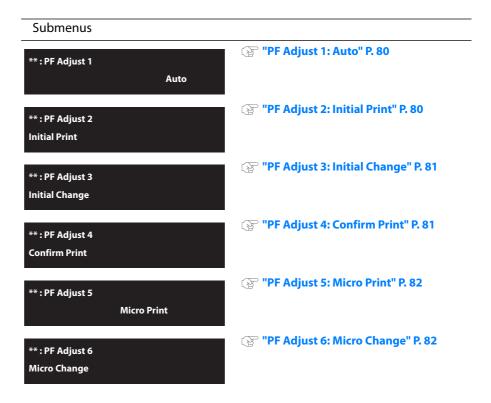



"PF Adjust" requires at least 400 mm printable width. Before printing, make sure that there is sufficient width on the media. If printable width is less than 400 mm, your printer will not perform printing. Printable width on the media can be adjusted by changing CR origin and side margin (left and right side margin) settings.

"Setup 5: Media Width" P. 87, "Setup 8: Origin" P. 90, "Setup 3: Side Margin" P. 86

Automatic PF adjustment method:

- Select " PF Adjust 1: Auto".
 - •The printer automatically performs a PF adjustment.
 - •If the print defect persists after automatic PF adjustment, perform manual PF adjustment.
 - "Manual PF adjustment method using adjustment print." P. 79

Manual PF adjustment method using adjustment print.

You will need a ruler to perform this adjustment.

- 1. Select " PF Adjust 2: Initial Print".
 - "Feed Length: 250 mm" is displayed on the front panel.
- **2.** After the initial adjustment printing, cut the media.
 - Measure the distance between the "+" in the initial adjustment print using a ruler.
- **3.** Refer to Chapter 1 "Media feed adjustment steps" P. 41 and select " PF Adjust 3: Initial Change" on the front panel.
- **4.** Use or on the front panel and enter the measured value in Step 2.
 - (Enter) to save the initial adjustment value.
- 5. Use or on the front panel to select "PF Adjust 4: Confirm Print".
 - "Feed Length: 250 mm" is displayed on the front panel.
- **6.** After the confirmation adjustment printing, cut the media.
 - •Measure the distance between the "+" in the confirmation adjustment print using a ruler. Then, confirm that the distance matches the feeding length when printing.
 - •If the distance does not match the feeding length, follow the procedure from Step 1 to Step 5 and readjust.
 - •If the distance matches the feeding length, proceed to Step 7.
- 7. Refer to Chapter 1 "Media feed adjustment steps" P. 41 and select " PF Adjust 5: Micro Print" on the front panel.
 - Check the pattern and micro adjustment value. In the pattern, look for a place that has least white lines or overlapping in images. The number printed below the adequate pattern is the micro adjustment value.



- Warm up the heater before printing the Confirm and Adjustment patterns.
 - "Skip Heater Warm Up? No" is displayed on the front panel.
- · You can start printing while the printer is warming up.
 - Transfer in the state of the st
- **8.** Enter the micro adjustment value according to the printing result in Step 7.

When you know the adjustment value (when changing the media or for similar operations)

- **1.** Enter the adjustment value for "PF Adjust 6: Micro Change".
- 2. Select whether you wish to print a confirm pattern and complete the setup.

PF Adjust 1: Auto



When the menu on the left appears, tap



The printer will automatically perform a PF adjustment.



· After automatic PF adjustment is performed, the micro change value will be automatically updated.

"PF Adjust 6: Micro Change" P. 82

• After automatic PF adjustment is performed, the initial change value might be reset.

PF Adjust 3: Initial Change" P. 81

PF Adjust 2: Initial Print



Performs Initial Print. Enter the "Feed Length" and tap



Setting values

**: Initial Print:
Feed Length: 250 mm

100 mm to <250 mm> to 500 mm


<> indicates the initial value.

- · After the initial adjustment printing, cut the media.
- With a ruler, measure the length between " + " in the pattern.
 In the example below, the measured place is shown in orange dotted lines and arrows.



The length of media that is fed (feeding length) for initial adjustment printing is normally set at 250 mm. If you increase the feeding length, the accuracy of the Media feed adjustment improves.

To change the feeding length, tap or on the front panel and change the set value.

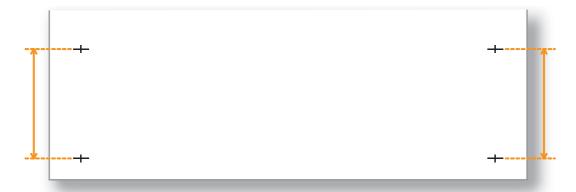

PF Adjust 3: Initial Change




Init.:

**: Initial Change:

You can set a value that is between +50 mm and -50 mm of the feed length 250.0 mm / 250 mm configured in "Initial Print".

(Enter).

PF Adjust 4: Confirm Print

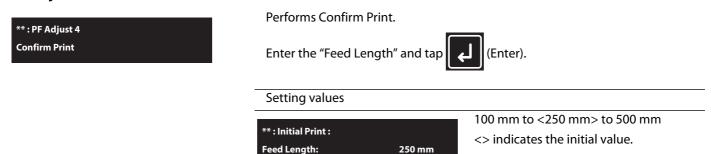


- · After the confirmation adjustment printing, cut the media.
- With a ruler, measure the length between "+" in the pattern. In the example below, the measured place is shown in orange dotted lines and arrows (the orange parts are not actually printed).
- If the measured length does not match the feeding length, re-correct with PF Adjust 2: Initial Print.
- If the measured length matches the feeding length, proceed to PF Adjust 5: Micro Print.



The length of media that is fed (feeding length) for initial adjustment printing is normally set at 250 mm.

If you increase the feeding length, the accuracy of the Media feed adjustment improves.

To change the feeding length, tap or on the front panel and change the set value.

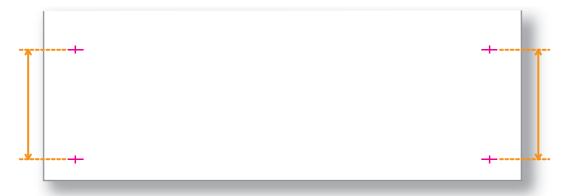


PF Adjust 5: Micro Print



Performs Micro adjustment Print.

Enter the appropriate micro adjustment value according to the print result.

• Observe the pattern and verify the micro adjustment value. In the pattern, look for a place that has least white lines or overlapping in images. The number printed below the pattern is the micro adjustment value. Enter the micro adjustment value according to the print result.

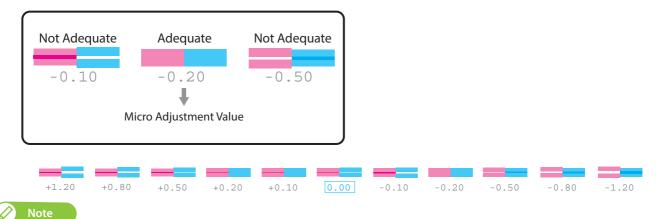

Once an appropriate micro adjustment value has been saved, the value will be the baseline value from the next time to be printed in the center of the pattern.


For example, if you have entered "-0.20" and print a micro adjustment pattern, values printed below block pattern will be changed to (from left) +1.00, +0.60, +0.30, 0.00, -0.20 (baseline value), -0.30, -0.40, -0.70, -1.00, -1.40.

PF Adjust 6: Micro Change






Select whether you wish to perform confirmation print and complete the setup.



**>4: Pre Heater

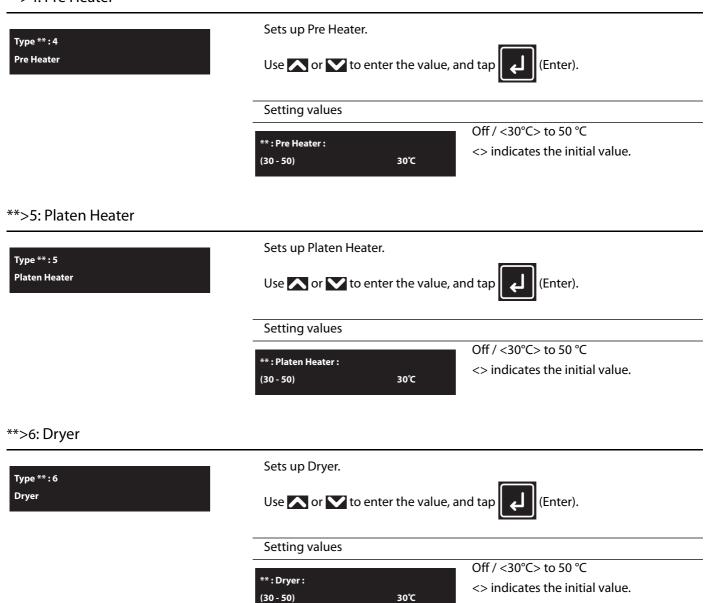





The message "Warming up" appears while the heater is functioning. While "Warming Up" is displayed, do not touch Media guide. You could burn yourself.


**>7: Vacuum Fan



Selects the vacuum level.

Use or to select the value, and tap (Enter).


• If you are using a thin or delicate media and there is risk of it wrinkling due to the fan, set a lower value for the fan.



**>8: Thickness



Sets the thickness of the media you are using.







 $80 \ \mu m$ to <170 μm > to 1,300 μm <> indicates the initial value.



- This menu is to automatically adjust print quality to a certain extent. If you want to improve print quality, manually adjust it.

 "***>2: Adjust Print" P. 72
- If you have adjusted the print settings, you do not need to configure the thickness of the media in this menu.

**>9: Copy User Type



This is for copying the currently selected User Type setting into another User Type.

The items that will be copied are:

- Settings for "Print Mode", "Effect"
- Adjustment values for "Adjust Print", "PF Adjust"
- Settings for "Pre Heater", "Platen Heater", "Dryer", and "Thickness"

Setting values



Here you can select the User Type to copy the settings into.


If you select ALL, the settings will be copied into all the User Type.

Setup 2: Spitting



Sets up the spitting operation while printing.

The display will shift to setting of the pass count only if "On" is set for "Spitting".

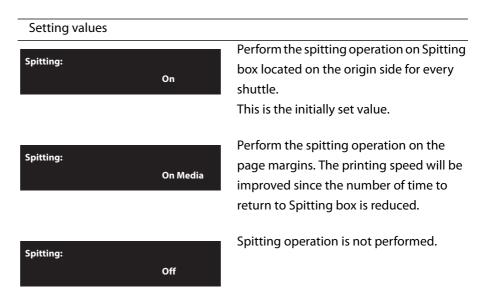




- Spitting is a maintenance operation for preventing clogging of the print head's nozzles. It consumes ink.
- When Spitting is set to "Off", nozzles will become easily clogged because spitting is not performed. In such a case, print quality cannot be guaranteed.
- When the spitting setting is "On Media", the maximum printable media width becomes 16 mm shorter. Therefore, the side margins become the value that you have set in Side Margin menu +8 mm.


☞ "Setup 3: Side Margin" P. 86


Pass Count menu



This is for setting the interval at which the print head will carry out spitting operation.

The head will carry out spitting operation every time it completes the number of passes that you set here.







If larger count is selected, the printing time will be faster, but it will increase the chance of nozzle clogging. In such a case, print quality cannot be guaranteed.


<Example of spitting operation>

Spitting setting	Pass Count setting	Operation
On	1 cnt	Perform the spitting operation on Spitting box every time Print head returns to the origin position. Spitting operation is not performed over the media.
On	5 cnt	Performs the spitting operation on Spitting box on the origin side every five times Print head returns to the origin position. Spitting operation is not performed over the media.
On Media	1 cnt	Performs the spitting operation on Spitting box on the origin side every time Print head returns to the origin position. Perform the spitting operation on Spitting box every time Print head returns to the origin position.
On Media	5 cnt	Performs the spitting operation on Spitting box on the origin side every five times Print head returns to the origin position. Perform the spitting operation on Spitting box every time Print head returns to the origin position.
Off	_	Spitting is not performed on Spitting box or the media.

Setup 3: Side Margin



Set up the right and left margins (side margins) while printing.







In the default setting, the printer starts printing with 5 mm margin on the sides.

Set the side margin to 10mm or more according to the following procedure because the overlapping part of the edge holder and media may be stained with ink.




• When the "Spitting menu" is set to "On Media", the maximum printable media width becomes 16 mm shorter. Therefore, the side margins become the value that you have set in Side Margin menu +8 mm.

Setup 4: Media Initial



Sets whether to detect the media width while initializing the media.

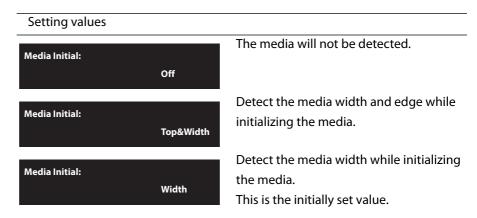




When "Media Initial menu" is set to "Off", set the media width of the current media in Media Width menu.

Setup 5: Media Width

Setup 5 **Media Width** Sets the width of the current media when the "Media Initial menu" is set to "Off". When the "Media Initial menu" is set to "Width", the detected media width will be displayed.




Setting values 210 mm to <1,000 mm> to 1,625 mm Media Width: <> indicates the initial value. (210 - 1625) 1000 mm

Setup 6: Output Mode




Sets how the media is handled after printing.

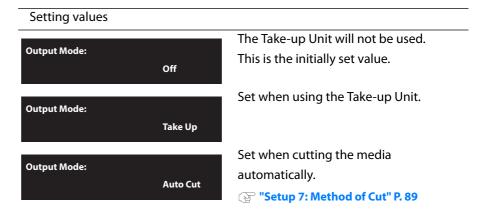

When the "Output Mode" is set to "Take Up"




When the "Output Mode" is set to "Take up", the menu is shifted to "Page Gap". In the "Page Gap menu", you can change the margin setting between images.

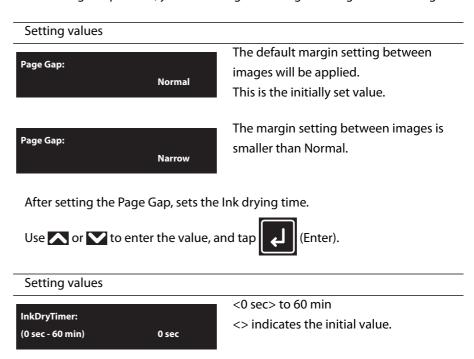


When the "Output Mode" is set to "Off" or "Auto Cut"

(0 sec - 60 min)



Setup 7: Method of Cut


Setup 7 **Method of Cut** Sets the media cutting operation after printing.

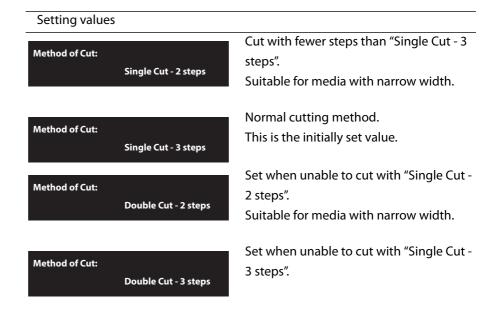



- When the media detection is set to "Off", the media cannot be cut automatically.
 - **Setup 4: Media Initial** P. 87
- Some media may not be cut (cannot be cut at all or cannot be cut finely). In such a case, set the "Output Mode menu" to "Off" and cut the media manually.
 - **Setup 6: Output Mode" P. 88 ⊘**


Cut Pressure menu

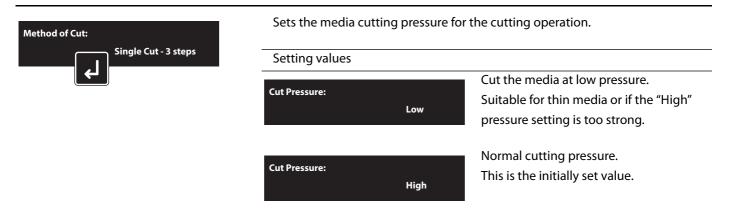


Setup 8: Origin



- Sets the print start position (origin) on the media.
 If you want to change the print start position to print an image on the blank space of the media, use this menu.
- Change the print start position (origin) in the PF (media feeding) direction.
- Change the print start position (origin) in the CR (carriage traveling) direction.
- Tap (Enter) to confirm the setting.

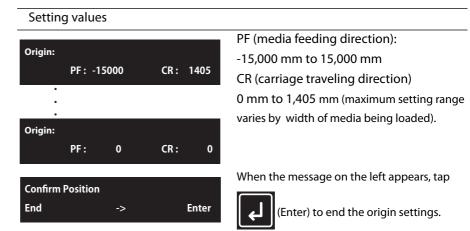

The arrow mark on the origin label shows the current print start position in CR direction.

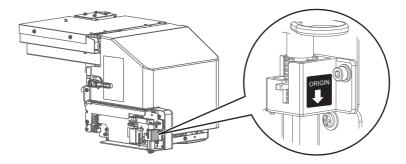



- Depending on the set value of the side margin, the maximum set value of CR (print head transferring distance) decreases.
 - **☞ "Setup 3: Side Margin" P. 86**
- The right side margin will be the following sum depending on the setting.
 CR of Origin menu + 8 mm (when the spitting is set to On Media) + Value set in Side Margin menu.

Setup 9: Prevent Stick menu



Sets up to prevent media from sticking when printing starts.

Setting values The stick-prevent operation is not Prevent Stick: performed. Off This is the initially set value. The stick-prevent operation is performed. Prevent Stick: Feed the media back and forth to prevent On from sticking.



When the "Output Mode menu" is set to "Take-up", the setting for the "Prevent Stick menu" is disabled.

☞ "Setup 6: Output Mode" P. 88

Setup 10: Standby Heating

Setup 10 Standby Heating Sets the time to preheat Heater while the printer is in the standby mode. When the preset time has passed, each Heater turns Off.

Use or to enter the value, and tap



Setting values

Standby Heating: (10 - 60)60 min 10 min to <60 min>

<> indicates the initial value.

Setup 11: Head Travel



Sets up the range that Print head moves while printing.

Setting values **Head Travel:** Data **Head Travel:** Machine Head Travel: Media

Print head moves the range of the print data width.

Print head moves from origin to the maximum printable media width.

Print head shifts within the media width. This is the initially set value.

Setup 12: Multi Strike

Setup 12 Multi Strike Sets up the overwrite count per line.

Use or to enter the value, and tap



Setting values

Multi Strike: (1 - 9) 1 cnt <1 cnt> to 9 cnt

<> indicates the initial value.

Setup 13: Strike Wait

Setup 13 Strike Wait Sets up the waiting time while overwrite printing.

Use or to enter the value, and tap



Setting values

Strike Wait: (0.0 - 5.0) 0.0 sec <0.0 sec> to 5.0 sec

<> indicates the initial value.

Setup 14: Slant Check

Setup 14 Slant Check Sets up slanting detection during media loading.

Setting values

Media Slant:

Off

Media Slant:

On

Slant Check is not performed.

Slant Check is performed. This is the initially set value.

Setup 15: Auto Cleaning



Configure the settings for the auto cleaning operation.

Submenus **Standby Mode menu** Auto Cleaning 1 Standby Mode **™** While Printing menu Auto Cleaning 2 **While Printing Before Print menu** Auto Cleaning 3 **Before Print**

Standby Mode menu



Choose the auto cleaning mode and timer to be performed while in standby mode.

Setting values



Off / <Spitting> / Short / Normal / Long <> indicates the initial value.

When the cleaning type is set to other than Off



If the cleaning type is set to Spitting, Short, Normal, or Long, the display goes to the Cleaning Interval setting to set the timer for auto cleaning while in standby mode.

Setting values



10 min to <360 min> to 1,440 min <> indicates the initial value.

While Printing menu



Choose the auto cleaning mode and timer to be performed while printing.

Off

Setting values

Cleaning Type:

<Off> / Short / Normal / Long

<> indicates the initial value.

When the cleaning type is set to other than Off



If the cleaning type is set to Short, Normal, or Long, the display goes to the Cleaning Interval setting to set the timer for auto cleaning while in printing.

Setting values

Cleaning Interval: (5 - 180) 5 min 5 min to <180 min>

<> indicates the initial value.

Before Print menu



Choose the auto cleaning mode to be performed before printing.

Setting values

Cleaning Type: Off <Off> / Short / Normal / Long

<> indicates the initial value.


Setup 16: Exhaust Fan

Setup 16 Exhaust Fan Sets up Exhaust fan operation.

Ventilates the inside of the printer to stabilize the parts performance. It also decreases the contamination by ink mist inside the printer.

We recommend that you use Exhaust fan, especially when printing for a long time.

Setting values



Turn Off Exhaust fan.

Start Exhaust fan at Low. This is the initially set value.

Start Exhaust fan at High.

Setup 17: Longstore



Wash Print head with the cleaning fluid.

Submenu



Wash Print head with the cleaning fluid. Tap [Enter] to perform head cleaning.

"Long-term storage" P. 157



Be sure to use the designated cleaning bag.

Setup 18: CR Maintenance

Setup 18 **CR Maintenance** Performs maintenance. Used in the following cases.

- Cleaning and replacing of cleaning wiper
- · Cleaning of print head circumference
- · Replacing absorption material for the flushing box
- · Replacing cutter



Submenus

Setting values



Performs maintenance.

Completes maintenance. Perform the pumping operation (start/ stop) by using .

Setup 19: Initialization

Setup 19 Initialization Restore the printer settings to the factory default.

Initialization: ALL Initialization: UserType Initialization: Except UserType

For initializing the settings of all the menus.

Initializes the settings in the User Type

Initializes the settings other than the ones in the User Type menu.

Setup 20: IP Address



Sets the IP address of the printer.

- Use to increase a digit.
- Use 💙 to decrease a digit.
- Use to move the cursor to the previous digit.
- Use to move the cursor to the next digit.

Тар

(Enter) after entering each digit.

Setting values



0.0.0.0 to <192.168.1.253> to 255.255.255.255

<> indicates the initial value.



Be sure to set the IP address, Subnet mask, and Gateway after consulting the network administrator.

Setup 21: Subnet Mask

Setup 21 Subnet Mask Sets the subnet mask of the printer.

- Use to increase a setting value.
- Use to decrease a setting value.
- Use to move the cursor to the previous digit.
- Use to move the cursor to the next digit.

Тар

(Enter) after entering each digit.

Setting values



0.0.0.0 to <255.255.255.0> to 255.255.255.255

<> indicates the initial value.

Setup 22: Gateway

Setup 22 Gateway

Sets the gateway.

- Use to increase a setting value.
- Use to decrease a setting value.
- Use \checkmark to move the cursor to the previous digit.
- Use to move the cursor to the next digit.

(Enter) after entering each digit.

Setting values



0.0.0.0 to <192.168.1.254> to 255.255.255.255


<> indicates the initial value.

Setup 23: Header Dump

Setup 23 **Header Dump** Sets whether to print the following information when printing.

- · Data header
- Data dot number (printed only when Header damp setting is "On")
- · Printing date and time
- · Printer serial number
- Firmware version
- Receiving time (printed only when Header damp setting is "Dump")
- Receiving size (printed only when Header damp setting is "Dump")

Setting values

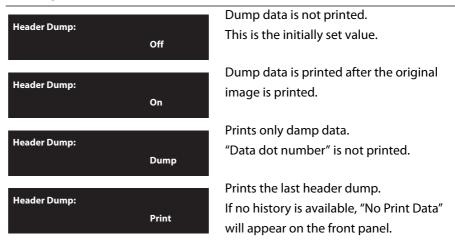



- The data will be useful when contacting technical support.
- Performing printing if the printer is connected to PC, the print settings of RIP soft you are using are printed on data header.

Setup 24: Heater Control

Setup 24 Heater Control Choose the appropriate heater mode for your media being loaded.

If the media cockling is visible on the print, you can reduce it by selecting the appropriate heater mode.

Setting values If you are using the non-heat sensitive **Heater Control:** media, choose the Normal mode. Normal This is the initially set value. If you want to reduce time to start printing **Heater Control:** and make media cockling less visible, Fixer choose the Fixer mode. If you are using the take-up unit and want **Heater Control:** to make media cockling less visible Dryer without reducing drying performance, choose the Dryer mode.

Setup 25: Start Feed

Setup 25 Start Feed You can change the margin setting between images.

- Value greater than 0: The margin setting between images will be wider than when setting "0".
- Value equal to 0: The default margin setting between images will be applied.
- Value less than 0: The margin setting between images will be smaller than when setting "0".





With take-up system: if you want to set "Start Feed" to below 0, set "Page Gap" to "Narrow". If not, the Start Feed setting is not reflected properly.

"When the "Output Mode" is set to "Take Up"" P. 88

Setup 26: Alert Buzzer




Selects how to turn off the printer beep sound when an error occurs. For unattended printing, you can select "Off" setting to avoid continuous buzzer beep.

Setting values Press any key on the front panel to turn off Alert Buzzer: beep sound. On This is the initially set value. After several beeps, the printer Alert Buzzer: automatically turns off beep sound. Off

Setup 27: Internal LED Lights

Setup 27 **LED Light** Selects the internal LED lights settings.

The lights help to inspect inside of the printer or your print during printing.

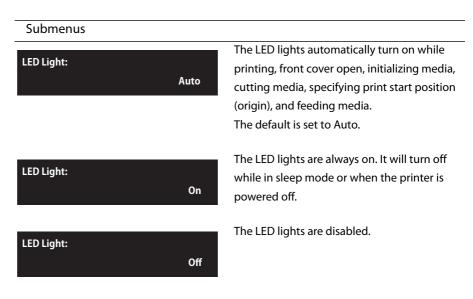

Setup 28: Front Interlace

Setup 28 Front Interlace Select to enable or disable the Front Interlace function.

It automatically fine tunes the media feeding amount of the first print swath to improve print quality.

Use the "Auto" setting for normal print job.


In following cases, try with "Off" setting to see if the print quality is improved:

- If the print defect due to nozzle missing is found on the first print swath of the print.
- If the print quality is clearly different between the first print swath and rest of the area on the print.

Front Interlace: Auto Automatically enable the Front Interlace function as needed. The default is set to "Auto". Disable the Front Interlace function.

Setup 29: Select Nozzle

Setup 29 Select Nozzle If missing lines still persist after several attempts of cleaning, you can check the nozzle conditions by printing the select nozzle patterns and choose only good nozzles for printing.

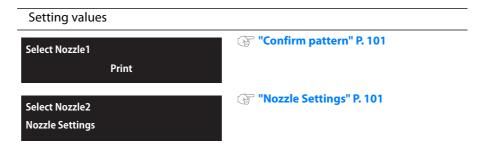

Nozzle Settings

Select Nozzle2 Nozzle Settings Goes to the nozzle settings menu.




Steps

- 1. Print the select nozzle patterns and find the pattern that does not have missing lines.
- **2.** Go to "Nozzle Settings" and choose the pattern selected in the Step 1.
 - Select "ALL", or one of "A" to "F".

Confirm pattern

- (Enter) to carry out printing.
- Look at the print and find the pattern that all the lines appear clean.
- In the example here, the pattern A, pattern B, pattern D and pattern E do not have missing lines.

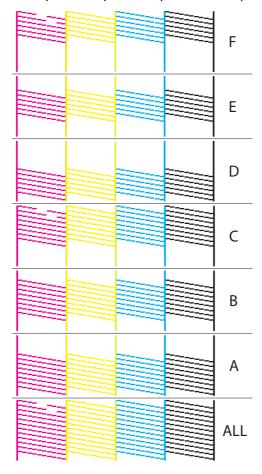

Nozzle Settings

- Tap .
- If there is more than one patterns not suffering from missing lines, choose the one that has more nozzles available for printing.
- ALL has the most available nozzles for printing, followed by A to C, and D to F (More ALL > A = B = C > D = E = F Less).
- For example, if the pattern A and pattern D do not suffer from blocked nozzles, you should choose A.

Setup 30: Auto Nozzle Check (Requiring the optional drop sensor unit)




- To use this function, you need an optional drop sensor unit.
 - Trop Sensor Unit Operation Manual
- To use the Auto Nozzle Check function, make sure to set the head height to "Low1", "Low2" or "Middle" and attach a black cleaning wiper (normal type).
- This function does not work with the head height "High" setting. Also, Mutoh does not guarantee this function to use with a grey wiper (for head height High) attached.
- If you use the printer in non-recommended environment (P. 184) or depending on the types of ink being loaded, the following symptom may occur:
 - cleaning is performed every time the printer runs an auto nozzle check.
 - · an auto nozzle check takes longer than usual.
 - nozzle clogs persist even after the auto nozzle check has been performed.*
 - *If it persists, manually run a nozzle check and cleaning.
 - "Nozzle check" P. 35, "Cleaning" P. 37
- This feature does not guarantee 100 percent prevention of nozzle clogs.

Setup 30 Auto Nozzle Check Select to enable or disable the auto nozzle check function.

In normal nozzle check, you will run a nozzle check print and will check missing lines by eye inspection.

If any nozzle clogs were detected, it will perform an automatic cleaning and will continue printing or will automatically select a nozzle segment that works properly to continue printing.

Tapping the (Cancel) key while auto nozzle checking will cancel the auto nozzle check.



Disable the auto nozzle check function. The default is set to "Off".

The printer runs an auto nozzle check when:

- waking up from sleep mode
- performing the first print after the number of print job setting was specified and each time before printing the number of print jobs specified



• If you switch the auto nozzle check setting to "On" while some nozzles are blocked, the printer will perform cleaning every time it runs an auto nozzle check, resulting in consuming more ink.

To avoid this, select a nozzle segment that works properly from **Setup 29: Select Nozzle** beforehand and then enable the auto nozzle check function.



Specify the auto nozzle check settings.

Submenus **Set the number of print jobs" P. 103** Auto Nozzle Check1 Number of print job **™** "Set the Select Nozzle" P. 103 Auto Nozzle Check2 **Select Nozzle**

Set the number of print jobs

Auto Nozzle Check1 Number of print job You can specify the auto nozzle check cycle by the number of print jobs performed. When specified, the printer will run an auto nozzle check in the following timing:

- · Before performing the first print after this setting was specified.
- Each time before printing the number of jobs specified.

For example) When set to "3 cnt":

the printer will run an auto nozzle check before printing for the first time after "3 cnt" was specified and before printing the third print job. Then an auto nozzle check will be performed every three jobs before printing.

Setting values




Off / <1 cnt> to 30 cnt

Set the Select Nozzle

Auto Nozzle Check2 Select Nozzle

In the ON setting, if there is any missing line in the nozzle check print even after 3 cleanings, the printer will automatically select one nozzle segment that works properly to continue printing.

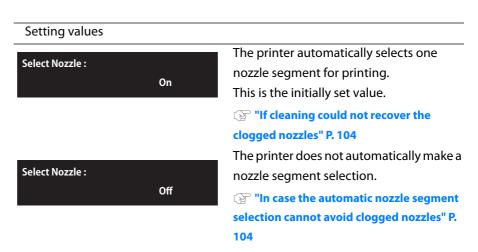

1. When an auto nozzle check detected clogged nozzles




If nozzle clogs were detected, the printer will automatically run cleaning to recover the nozzles.

Up to 3 cleanings will be performed.

2. If cleaning could not recover the clogged nozzles

When "Pattern B" is selected:



If the nozzle clog is still present after 3 cleanings, the printer will automatically select a nozzle segment that works properly to avoid clogged nozzles for printing.

- While the printer is ready to print, a nozzle segment (alphabetical character) that the printer automatically selected will appear on the operation panel.
- If you have changed the settings in **Setup 29: Select Nozzle**, the length of media will be displayed on the panel.

3. In case the automatic nozzle segment selection cannot avoid clogged nozzles



If the printer is unable to select a print head or a nozzle segment that works properly even after 3 cleanings, the message "Auto Nozzle Check Nozzle Clog Present" will appear on the operation panel.

The print job that the nozzle clog was detected will be deleted. Other print jobs sent to the printer will be put on hold.

You must delete the print jobs currently on hold from the print queue and manually run
a nozzle check and cleaning.

"Nozzle check" P. 35, "Cleaning" P. 37

Mutoh recommends that you recover the clogged nozzles and then print your job again.

• Tapping (Enter) key will clear the message and will continue printing while nozzles are still clogged.

Setup 31: Power Off




Turn off the printer.

"Turning the power OFF" P. 24

Setup 32: Temporary



Displays the menus which have been set to hide in the "Menu4: Menu Option" temporarily.



(Enter) to return to the previous menu with all set up items displayed.

Menu 2: Test Print


Test Print 1: Nozzle Check

Test Print 1 Nozzle Check Use this menu to check that the print head and print nozzles you selected can properly print without nozzle clogging and missing or too light lines.

"Nozzle check steps" P. 36

This menu will print a nozzle check pattern selected from the Select Nozzle menu.

☞ "Setup 29: Select Nozzle" P. 100






- The pattern shown above is an example when "Select Nozzle" is set to "Nozzle All".
- For details of "Select Nozzle", see "Setup 29: Select Nozzle" P. 100.
- The printer information (date and time printed, printer's serial number, firmware version, Select Nozzle setting) is printed on the nozzle check pattern.

Test Print 2: Nozzle Check F

Test Print 2 Nozzle Check F Use this menu to check that the print head and print nozzles you selected can properly print without nozzle clogging and missing or too light lines.

This menu will print a nozzle check pattern using all of the nozzles on the print head.


"Nozzle check F steps" P. 35





• The printer information (date and time printed, printer's serial number, firmware version) is printed on the nozzle check pattern.

Test Print 3: Mode Print



Mode print can be performed. Used to confirm the following printing conditions.

- Print quality
- Effect
- Setting value for Dryer
- Micro adjustment value for feed correction

2021/1/01 0:00 Quality-i-Screen/Pre:30°C/Platen:30°C/Dryer:30°C/PF Adjust:0.00%


Test Print 4: Setup List



Setup list printing is performed.

Use this to check the current setting contents and the User Type.

Setup List




User Type List

User Type Print Mode > Effect PF> Inital Adjust FF> Micro Adjust Vacuum Fan Thickness	Type 1	Type 2	Type 3	Type 4	Type 5
	Graphics 2	Graphics 2	Graphics 2	Graphics 2	Graphics 2
	Fine&Fog	Fine&Fog	Fine&Fog	Fine&Fog	Fine&Fog
	250.0 / 250mm	250.0 / 250mm	250.0 /250mm	2500 / 250mm	250.0 / 250mn
	0.00%	0.00%	0.00%	0.00%	0.00%
	High	High	High	High	High
	170 \(\mu\) m	170 μ m	170 μ m	170 μ m	170 μ m
UserType Print Mode Print Mode>Effect Print Mode>Effect Print Mode>Effect PrintMode Pr	Type 6	Type 7	Type 8	Type 9	Type10
	Graphics 2	Graphics 2	Graphics 2	Graphics 2	Graphics 2
	Fine&Fog	Fine\$Fog	Fine&Fog	Fine&Fog	Fine&Fog
	250.0 / 250mm	250.0 / 250mm	250.0 / 250mm	250.0 / 250mm	250.0 / 250mn
	0.00%	0.00%	0.00%	0.00%	0.00%
	High	High	High	High	High
	170 μ m	170 μ m	170 μ m	170 μ m	170 μ m
User Type Print Mode Print Mode>Effect FF>Initial Adjust FF>Select FF>More Adjust Vacuum Fan Thickness	Type11	Type12	Type13	Type14	Type15
	Graphics 2	Graphics 2	Graphics 2	Graphics 2	Graphics 2
	Fine&Fog	Fine&Fog	Fine&Fog	Fine&Fog	Fine&Fog
	250.0 / 250mm	250.0 / 250mm	250.0 / 250mm	250.0 / 250mm	250.0 / 250mn
	0.00%	0.00%	0.00%	0.00%	0.00%
	High	High	High	High	High
	170 μ m	170 µm	170 μ m	170 μ m	170 μ m

Test Print 5: Palette



Palette print is executed for the color demonstration.





When the selected print mode of the user type is Quality or Production, Palette menu is not displayed.

"**>1: Print Mode" P. 70

Menu 3 : Cleaning



Select the cleaning type.

Setting values	3	
Cleaning Type1	Short	Consumes less ink than Normal cleaning.
Cleaning Type2	Normal	Conduct nozzle check before and after printing, and use when nozzle missing is found.
Cleaning Type3	Long	Consumes more ink than Normal cleaning. When nozzle missing still occurs after Normal cleaning, conduct Long cleaning.
Cleaning Type4	Little Charge	Though much better cleaning results can be expected than Long cleaning, it consumes a large amount of ink.
Cleaning Type5 Initial Charge		Gives a rather higher cleaning effect than "LittleCharge", but also consumes rather more ink.

Menu 4: Menu Option


You can choose whether to display the menus in "Menu 1: Setup".

Choose whether you wish to display a menu by tapping




[*]= the item will be displayed

[]= the item will not be displayed

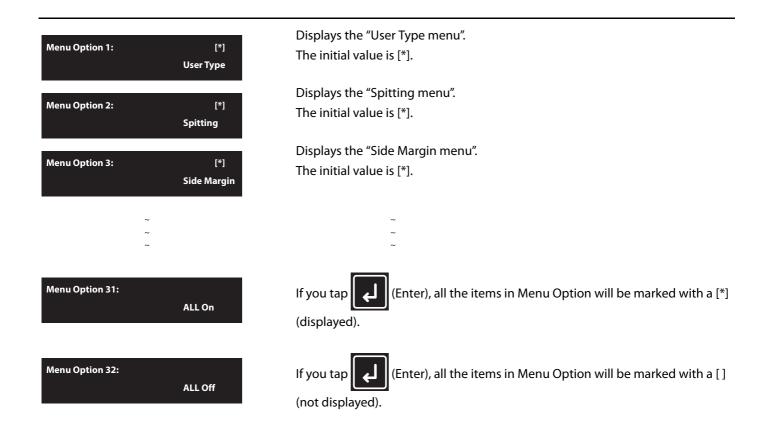

Menu 5 : System Info.

Menu 5 System Info. Display the system information on your printer.

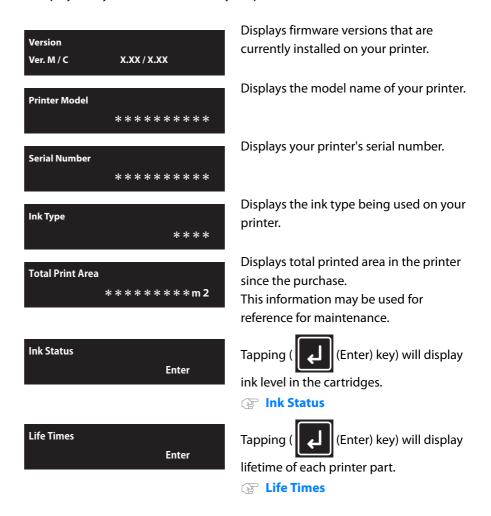

Ink Status

KCMY: 100/90/90/80 Displays the percentage of ink level in each ink bag.

To identify the ink slots corresponding to each ink color shown here, see "Main components of your printer" P. 9.



- To display various information of Ink, use genuine ink and S/C cards. If Ink bags other than genuine Ink bags are used, ink status will not be displayed correctly.
- If it is blinking at 10%, smartchip recovery is being performed on the corresponding S/C card.

⟨▼ "Smartchip recovery" P. 171

Life Times




Displays the operational life time of each part.

- The lifetime of each part is indicated by the asterisks (Maximum 5 asterisks: 100% left). As the part deteriorates, the number of asterisks decreases one by one (20%).
- The part should be replaced when all of the asterisks have disappeared and "Change" is displayed.
 - Contact your local MUTOH dealer to ask for replacing parts.
- After "Change" appears, "Life Times [Pump]" or a similar message will be displayed when you are not in this menu.

You can delete this message by pressing the





Displays the service life for the print head. The service life in this case is at 60%.

Displays the service life for the pump. The service life in this case is at 60%.

Displays the service life for the CR motor. The service life of the component in this case is over.


Have the component replaced.

Displays the service life for the PF motor. The service life in this case is at 80%.


Menu 6 : Sleep Mode




Start Sleep Mode and set the head cleaning interval during Sleep Mode.

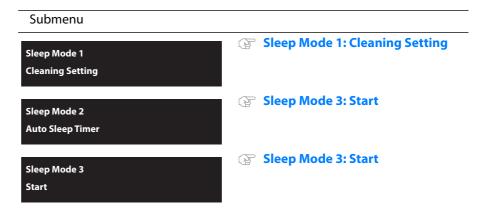

Sleep Mode 1: Cleaning Setting



Set the timer to perform the head cleaning while in sleep mode.

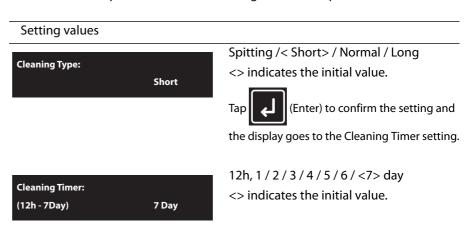

Sleep Mode 2: Auto Sleep Timer

Sleep Mode 2 **Auto Sleep Timer** Set the timer to automatically enter sleep mode if no printing is performed for certain period.



Sleep Mode 3: Start

Sleep Mode 3 Start

Put the printer into sleep mode.

- Tap **>** .
- "Sleep Mode Start -> Enter" is displayed.

(Enter).

- "In Sleep Mode Wake up -> Enter" is displayed. The sleep mode will start.
- To exit the sleep mode, tap

During Sleep Mode, even if the set amount of time has passed, print-head cleaning is not performed under the following circumstances.

- When the front cover is open.
- When the maintenance cover is open.
- The pressure rollers is released.
- The waste ink tank is full.
- The ink bag case has been removed.
- The S/C card has been removed.
- The inserted S/C card is not the genuine S/C card, etc.


If one of the above conditions occurs during Head cleaning, cleaning is stopped.

When the printer returns to a normal state, Head cleaning is restarted.

Menu 7 : Display


Display 1: Language

Display 1 Language Choose the language of the front panel from the following selection.

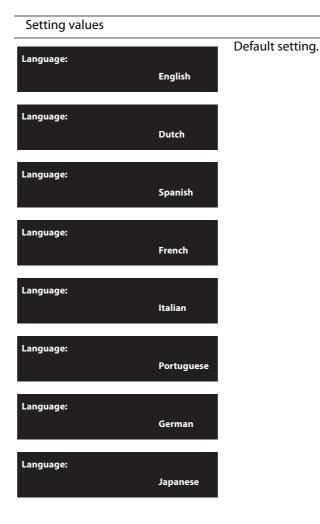

Display 2: Temperature

Display 2 Temperature Choose the unit of the temperature displayed on the front panel.

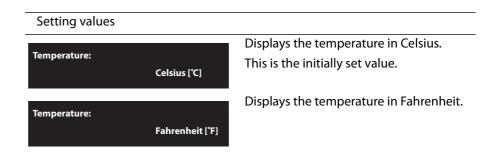

Display 3: Length




Choose the unit of the length displayed on the front panel.

Setting values Displays the length in millimeters (mm). Length: This is the initially set value. mm Displays the length in inches (inch). Length: inch

Menu 8: Job Status



Various information of previous print will be displayed.



Displays if thec print is completed.

- When the print is completed: [Completed]
- When the print is canceled: [Canceled]

The total length of print data (media feeding direction) will be displayed.

The printed length will be displayed.

The remaining length of print data will be displayed.




- The values displayed in this function are just standard values, not guarantee the accuracy.
- If the print data includes no length data, all information will be displayed as "0".
- This function is to check the information of print data with the print operation is completed. For the details on data while printing, please refer to the "Menu 7: Job Status" P. 59.

Menu 9: Roll Length Manage

Menu 9 Roll Length Manage Before replacing with another roll media, you can print the remaining roll length information on the roll media.

This information can be printed with a code that your printer can read. The next time when the roll media is loaded, your printer will read the code and will automatically specify the Roll Length settings.

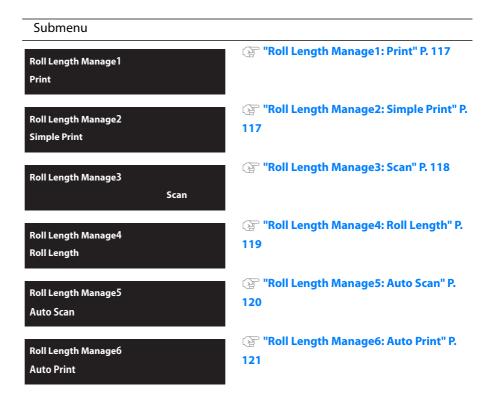



• "Roll Length Manage 1: Print" or "Roll Length Manage 2: Simple Print" requires at least 400 mm printable width. Before printing, make sure that there is sufficient width on the media.

If printable width is less than 400 mm, your printer will not perform printing. Printable width on the media can be adjusted by changing CR origin and side margin (left and right side margin) settings.

"Setup 5: Media Width" P. 87, "Setup 8: Origin" P. 90, "Setup 3: Side Margin" P. 86

• The Roll Length Manage menu will not be displayed if "Media Initial" is set to "Off".

☞ "Setup 4: Media Initial" P. 87

• The Roll Length Manage menu will not be displayed if the media is not loaded.

Roll Length Manage1: Print

Print the remaining length management information with text and code on the roll media.



- Tap **>** .
- "Do you want to cut?" is displayed.

Use or to choose "Yes" or "No".





- The printer is unable to print this information if "Roll Length" is set to "Off".
- This menu will print the following information:
 - Type of roll media
 - Remaining roll length
 - Date printed
 - Remaining length management code



Roll Length Manage2: Simple Print

Print the remaining length management information with text only on the roll media.

Roll Length Manage2 Simple Print

- Tap **>** .
- "Do you want to cut?" is displayed.

Use or to choose "Yes" or "No".




- The printer is unable to print this information if "Roll Length" is set to "Off".
 - (Roll Length Manage4: Roll Length" P. 119
- This menu will print the following information:
 - Type of roll media
 - Remaining roll length
 - Date printed




Roll Length Manage3: Scan

Your printer can scan the remaining length management code that was printed on a roll media with "Roll Length Manage1: Print".

- [1] Load a roll media that the remaining length management code has been printed on it.
 - **☞** "Load a roll media into the printer" P. 25
 - Roll Length Manage1: Print" P. 117
- [2] Check that the code printed on the media has passed through the pressure rollers.







[4] Menu 9
Roll Length Manage

Tap until the menu on the left appears.

• Tap .

[5] Roll Length Manage3
Scan

Tap wuntil the menu on the left appears.

• Tap (Enter).

• Tapping the (Cancel) key while scanning will cancel the scan.

- [6] When your printer scanned successfully, the following settings will be specified in Roll Length automatically:
 - Type of roll media
 - · Remaining roll length
 - "Roll Length Manage4: Roll Length" P. 119




- The printer may fail to scan if a remaining length management code has dirt or fold marks on it.
- Your printer is unable to scan if "Output Mode" is set to "Take Up".
 - **☞ "Setup 6: Output Mode" P. 88**
- In case the printer failed to scan the code, manually specify the Roll Length settings based on the remaining length management information printed in text on the media.
 - Roll Length Manage4: Roll Length" P. 119

Roll Length Manage4: Roll Length



Sets up the media length.

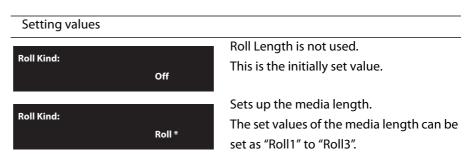

When the "Roll Kind" is set to "Roll 1", "Roll 2" or "Roll 3"

Length menu



Sets up the media length.

Setting values Length: (1 - 1500) 30 m

1 m to <30 m> to 1,500 m

<> indicates the initial value.

Print stop menu



Sets whether or not to display "Roll Remain Error" and pause printing when the length of the media that is counted inside the printer becomes 0.

Setting values



The media remaining count is not used to judge for pausing printing. Printing pauses when the rear sensor responds. This is the initially set value.



Even when the rear sensor does not respond, printing pauses when the media remaining count becomes 0.



- Normally you can set this as "Off" as the rear sensor detects when the roll paper is finished.
- If you are using the media that does not come off the paper core easily when it is finished, printing may not be paused when the media is finished, if the "Print stop menu" is set to "Off". If this happens, set this to "On".

Near End menu



Sets whether or not to display "Roll Near End: *m" (* is replaced with a number between 1 and 10) before the length of the media that is counted inside the printer becomes 0.

Near End: Off "Near end" is not displayed. This is the initially set value. "Near end" is displayed when the remaining count for the media becomes

the length you selected.

Roll Length Manage5: Auto Scan

Roll Length Manage5
Auto Scan

The ON setting will automatically scan the remaining length management code when

- the printer is powered on.
- · you replace a roll media.

Tapping the (Cancel) key while scanning will cancel the scan.

When your printer scanned successfully, the following settings will be specified in Roll Length automatically:

• Type of roll media

Setting values

· Remaining roll length



Auto Scan: Off Auto Scan: On

Automatic scan of remaining length management code is disabled. The default is set to off.

Automatically scans the remaining length management code printed on a roll media when

- the printer is powered on.
- you replace a roll media on the printer.



- The printer may fail to scan if a remaining length management code has dirt or fold marks on it.
- In case your printer is unable to read the code even if this setting is ON, check that the following settings are set to "OFF" or "Auto cut".
 - "Setup 4: Media Initial" P. 87, "Setup 6: Output Mode" P. 88
- In case the printer failed to scan the code, manually specify the Roll Length settings based on the remaining length management information printed in text on the media.
 - ™ "Roll Length Manage4: Roll Length" P. 119

Roll Length Manage6: Auto Print

Roll Length Manage6 **Auto Print**

The ON setting will prompt the confirmation message when you perform media cutting, asking you whether to print a remaining length management information on a roll media. This option helps you to shorten the steps to print a remaining length management code.

Setting values This confirmation message will not be **Auto Print:** displayed when you perform media Off cutting. The default is set to off. The confirmation message "Print Roll's **Auto Print:** Remain?" appears when you perform On media cutting. Use or to choose "Yes" or "No".

(Enter).

- · When "Yes" is selected The printer prints a remaining length management code on a roll media after media is cut.
- When "No" is selected This code will not be printed on a roll media after media is cut.




• The Auto Print function cannot be enabled if "Roll Length Manage4: Roll Length" is set to off.


War and Manage 4: Roll Length P. 119

Menu chart

Setting menu 1

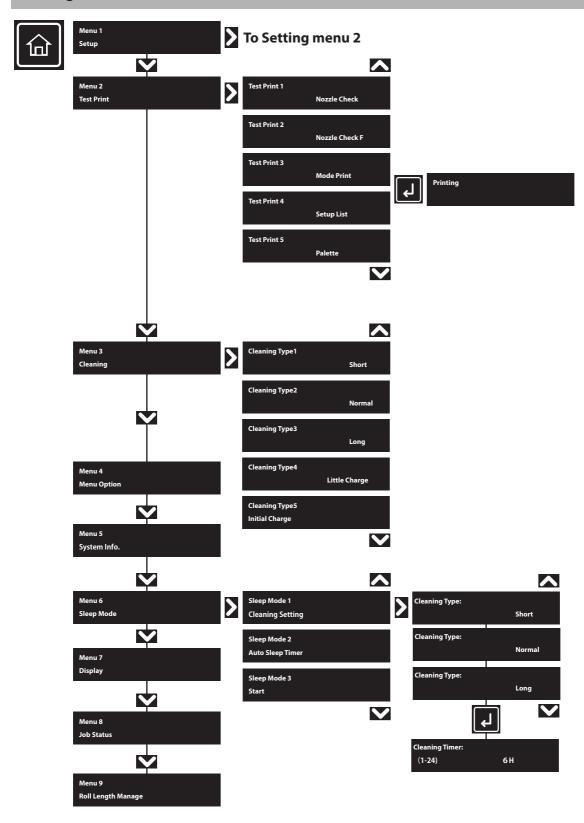


Setting menu 2

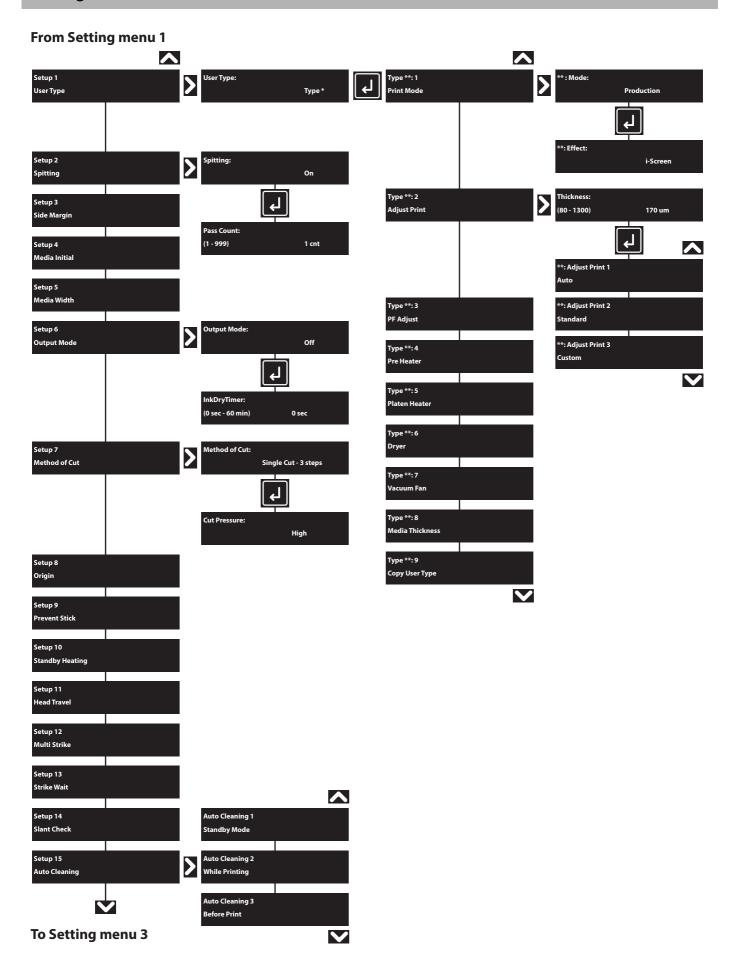


Setting menu 3

From Setting menu 2

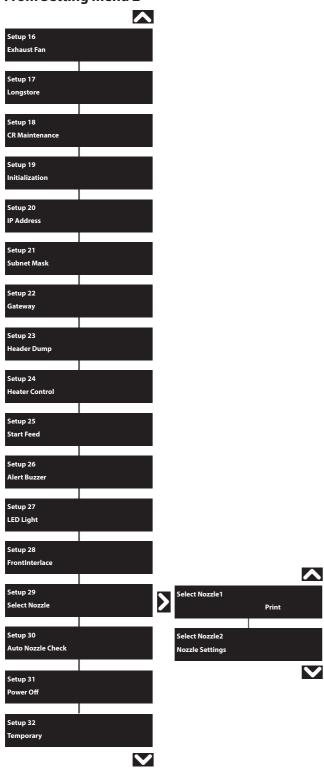

Menu during printing

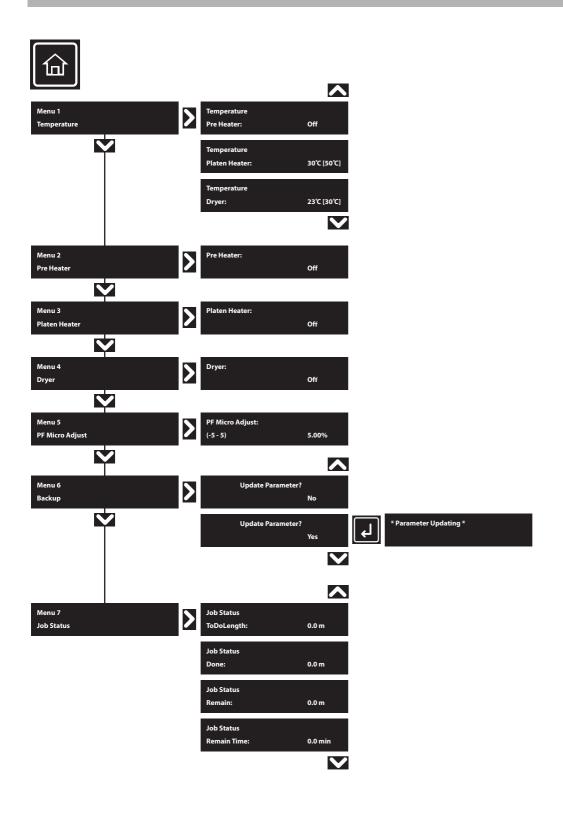

Chapter 3 Maintenance

Maintenance	128
Checking ink and replacing ink bag	129
Checking ink level	129
Emptying waste ink tank	133
Emptying waste ink tank	133
Cleaning	135
Head cleaning Soak Cleaning. Cleaning of cleaning wiper Cleaning around the capping unit Cleaning around the print head Cleaning the color sensor Inside cleaning.	137 138 141 143
Replacing consumable parts	148
Replacing absorption material for the flushing box	150
Moving or transporting the printer	155
Moving the printer Transporting the printer Long-term storage	156 157

Maintenance

To maintain the performance of this product, please conduct maintenance by yourself. The types of maintenance are shown next.

Before and after daily operation	"Nozzle check and cleaning" P. 35
Based on your usage condition	"Head cleaning" P. 135
	"Cleaning of cleaning wiper" P. 138
	"Cleaning around the print head" P. 143
	"Cleaning the color sensor" P. 145
	"Replacing ink bag" P. 130
	"Emptying waste ink tank" P. 133
	"Replacing absorption material for the flushing box" P. 148
	"Replacing Cutter" P. 150
Weekly	"Cleaning of cleaning wiper" P. 138
	"Cleaning around the capping unit" P. 141
Monthly	"Inside cleaning" P. 147
Every twelve months	"Replacing the cleaning wiper" P. 152
When not used for a week or more	"Head cleaning" P. 135 (Once a week)
When not used for a long period	"Long-term storage" P. 157




Since a service technician has to handle following cases, please contact your local MUTOH dealer.

- Error requiring restart is happening repeatedly.
- The message to notify the life of print head, pump and various motors is displayed.

"Messages and Error Messages" P. 166

Checking ink and replacing ink bag

Checking ink level

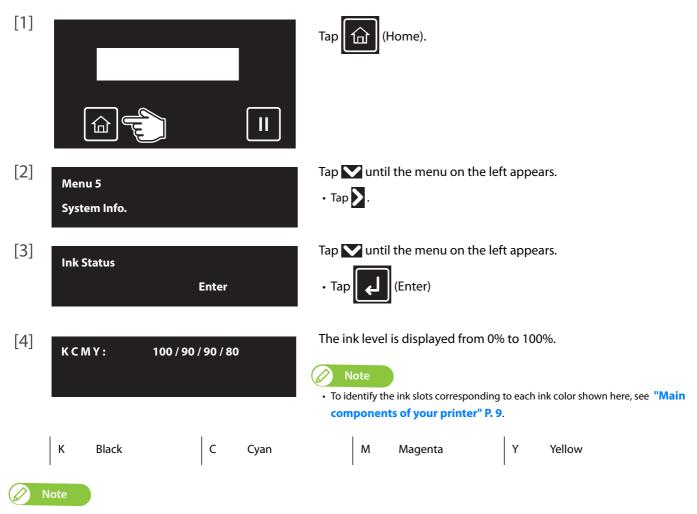

• If it is blinking at 10%, smartchip recovery is being performed on the corresponding S/C card.

⊗ "Smartchip recovery" P. 171

When it becomes time to replace ink bag

When the ink level becomes low, the error LED of the front panel flashes and a buzzer sounds.



- In the figure to the left, yellow ink is nearing its end and needs to be replaced soon.
- [2] Prepare the replacement ink bag.

Replacing ink bag

When an ink bag runs out of ink, the error message [Ink End] or [S/C Ink End] appears on the panel with blinking error LED and beep sound. Replace an ink bag immediately. The printer will not resume printing until the ink bag is replaced.



A CAUTION



Wear the protective gloves \cdot glasses \cdot mask and avoid contact with your eyes or skin.

Eye or skin contact may cause slight irritation or bloodshot eyes. If in eyes or on skin, immediately flush with water. If irritation is present, seek medical advice/attention immediately.

| Important!

- Do not replace ink bag when the printer is powered off. Ink level cannot be detected correctly.
- If ink bag is moved from cold to warm place, leave it in the room temperature at least three hours.
- If you do not have any replacement ink bag, do not remove the empty ink bag from the printer. This may cause the nozzle clogs.


1. Removing the ink bag case

[1]


[Y] Ink End



- The buzzer stops. If the ink is not replaced after a while, the buzzer will sound again.
- In the figure to the left, yellow ink must be replaced.
- [2] Remove the ink bag case and S/C card that you need to replace from each slot.

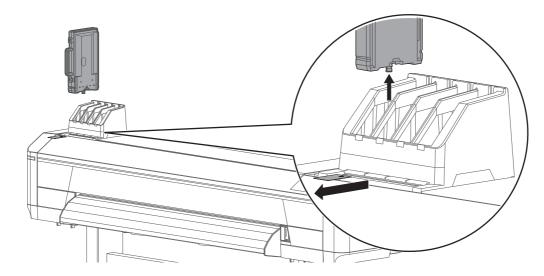

[3]




Unlock four latches and open the ink bag case.

| Important!

Try not to apply excessive force to unlock them. This will cause damage to the latch.

[4]




Remove the empty ink bag.

Note

Place the used ink bag in a plastic bag or the like and dispose of the ink bag according to the local regulations.


2. Installing the ink bag




Prepare the new ink bag, and follow the instructions below to invert it to mix the ink.

- Face the ink spout side upwards for 3 seconds.
- Invert it and count for 3 seconds.
- Repeat that 3 times.

[2]



Put the ink bag into the case.




Important!

When installing 1,000 ml / 2,200 ml ink bag cases:

- If you are using 2L ink bag, release the lock of divider plate in the case, and then put the ink bag into the case.
- If you are using 1L ink bag, always lock the divider plate.

[3]




Close the ink bag case.

Important!

Make sure the spout of ink bag is properly fitted into the groove in the

If not fitted, the printer cannot correctly detect ink bag.




Close all the latches $(\times 4)$ of the case properly.

Important!

Check that all the latches (×4) are closed. If not, it may cause ink spillage.

- [4] Insert the ink bag case with the new ink bag installed and new S/C card into each slot.
 - Match the colors of the ink color indicating label on the printer and the label on the ink bag.
 - Face the latch side toward you and insert the case into each slot.
 - Make sure that they are fully inserted.

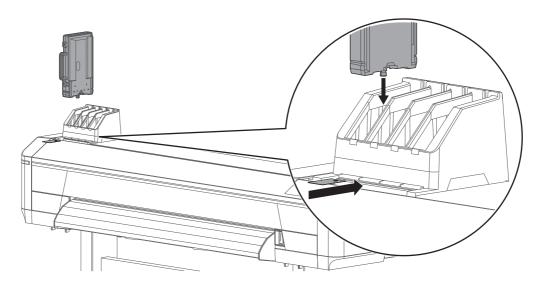

Emptying waste ink tank

Emptying waste ink tank

In the following cases, drain waste ink in the waste ink tank into a container to empty the tank.

- When the waste ink tank is more than half full.
- When "Full WastelnkTank" is displayed on the front panel.

Display messages

Full Waste Ink Tank

The waste ink tank is full. Empty the tank immediately.

• The printer will stop operation until you empty the waste ink tank. If the waste ink is not drained after a while, the buzzer will sound again.



Empty the waste ink tank before moving the printer.

1. Drain waste ink into a container



! WARNING



Waste ink collected from this product is classified as industrial waste. Dispose of waste ink according to the local waste disposal regulations.

CAUTION



Wear the protective gloves \cdot glasses \cdot mask and avoid contact with your eyes or skin.

Eye or skin contact may cause slight irritation or bloodshot eyes. If in eyes or on skin, immediately flush with water. If irritation is present, seek medical advice/attention immediately.

[1] Prepare a container to collect waste ink.



The capacity of the waste ink tank is 2,000 ml. Make sure to prepare a container with at least 2,000 ml capacity.

Cover the floor just under the waste ink tank using a paper that you do not use. [2]


[3]



Open the waste ink valve and drain waste ink into the container.

[Important!

To avoid ink splash, move the container closer to the waste ink valve while draining waste ink.



Once you empty the tank, close the waste ink valve securely.

• Wipe the opening of the valve with a cloth.

 $\begin{tabular}{ll} [5] & Dispose of waste in k according to the local waste disposal regulations. \end{tabular}$

Cleaning

To maintain your printer in the best condition, cleaning must be performed as instructed.

Head cleaning

If you find missing or thin lines on your print or nozzle check print, perform head cleaning. Following cleaning modes are available:

Short cleaning	Consumes less ink than Normal cleaning.
Normal cleaning	If nozzle missing is found on the nozzle check print, perform Normal cleaning.
Long cleaning	If nozzle missing still persists after Normal cleaning, perform Long cleaning. It consumes more ink than Normal cleaning.
Little Charge	Little Charge gives higher cleaning than Long cleaning, but consumes large amount of ink. To access to this menu, go to "Menu 3 Cleaning" > "Cleaning Type". "Menu 3: Cleaning" P. 108
Initial Charge	Initial Charge offers more powerful cleaning than Little Charge, but consumes large amount of ink. To access to this menu, go to "Menu 3 Cleaning" > "Cleaning Type".

Important!


When you perform "Little Charge" or "Initial Charge",

- Do not power off the printer.
- Do not disconnect the power cords.
- Do not open the front cover and maintenance cover during cleaning.
- Do not release the pressure rollers.
- Do not remove ink bag cases and S/C cards from the printer.
- Be sure that remaining ink in the ink bag is enough to perform cleaning.

If cleaning is interrupted, it may consume more amount of ink.


1. Performing Head cleaning

[1]



Tap 🔰 .

[2]



Use or to choose the cleaning mode.



• The printer will start cleaning.


[3] Run a nozzle check.

2. Performing Nozzle check

[1] Load a roll media to print the nozzle check pattern.

③ "Loading a roll media" P. 25

[2]



Тар 🕻 .


[3]





• The printer will print the nozzle check pattern.

- Check the print result. [4]
 - If you find missing or thin lines on the print, go to "Performing Head cleaning" P. 136.
 - If all lines are clearly printed, you can start printing.





- The pattern shown above is an example when "Select Nozzle" is set to "Nozzle All".
- If nozzle missing persists after repeating normal cleaning several times, perform Long cleaning.
- If several Long cleaning does not help to recover nozzles, perform "Cleaning of cleaning wiper" P. 138 or "Cleaning around the print head"
- If nozzle missing still persists, perform Little Charge from "Menu 3 Cleaning" > "Cleaning Type".

 "Menu3: Cleaning" P. 108
- If "Long" or "Little Charge" cleaning does not help to recover the nozzles, go to "Setup 29: Select Nozzle" P. 100 to select the nozzles that fire properly.

Soak Cleaning

Cleaning period:

- once a week (recommended)
- nozzle clogging or nozzle deflection persists after cleaning attempt.

For procedures, download the soak cleaning procedure sheet from MUTOH Club (https://mutoh-club.com/mutoh/guser/).

Cleaning of cleaning wiper

Cleaning period:

- Weekly
- When print blurring and dot missing remain after head cleaning is done.

Preparation:


· Cleaning stick



During cleaning, please note the followings.

- If it is hard to remove the stain, perform "Short" Head cleaning, and then clean again.
- Use a dry cleaning stick. A damp stick can cause damage to the print head.
- Do not touch the tip of a cleaning stick with fingers. Skin oil will damage the print head.
- Do not reuse a cleaning stick. Dust on the stick will damage the print head.
- This cleaning takes about 5 minutes. If it takes longer, the stick will get dry causing damage to the print head.

1. Putting the printer into the CR maintenance mode

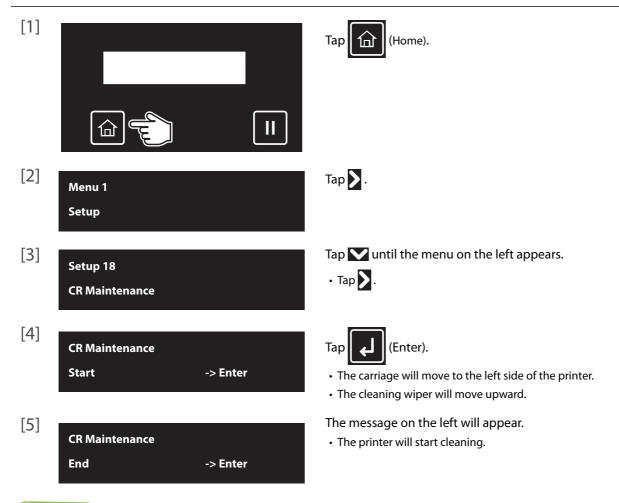




If you tap the while "CR Maintenance End -> Enter" is displayed, the pump is activated, sucking up the ink in the cap.

2. Cleaning the cleaning wiper




Open the front cover.

[2]



Open the maintenance cover on the right side.

[3]



Wipe the cleaning wiper with a cleaning stick.


• Wipe the left side of the wiper back and forth.



刘 Important!


If it is hard to remove the stain, perform "Short" Head cleaning, and then clean again.

[4]




Wipe the right side of the wiper back and forth.

[5]



Close the maintenance cover.

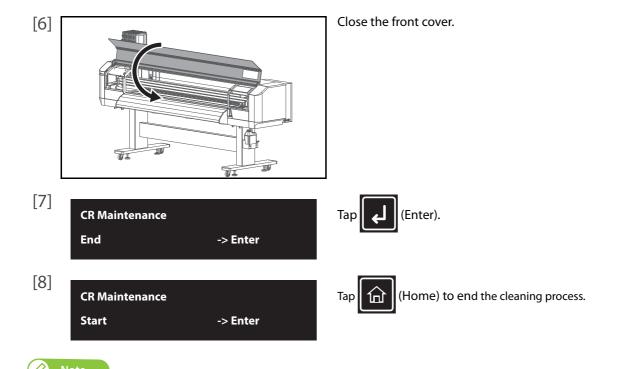

Used cleaning stick should be put in a plastic bag, etc, and dispose of it in compliance with local ordinance and instructions of local authorities.

Cleaning around the capping unit

Cleaning period:

Weekly


Preparation:

· Cleaning stick




During cleaning, please note the followings.

- Use a dry cleaning stick. A damp stick can cause damage to the print head.
- Do not touch the tip of a cleaning stick with fingers. Skin oil will damage the print head.
- Do not reuse a cleaning stick. Dust on the stick will damage the print head.
- This cleaning takes about 5 minutes. If it takes longer, the stick will get dry causing damage to the print head.
- [1] Put the printer into the CR maintenance mode.
 - **"Putting the printer into the CR maintenance mode" P. 138**
- [2] Open the front cover.




Open the maintenance cover on the right side.



Use the cleaning stick to clean around the rubber part of the capping unit to remove the ink deposits and dust.




If it is hard to remove the stain, perform "Short" Head cleaning, and then clean again.



Close the maintenance cover.

[6] Close the front cover.

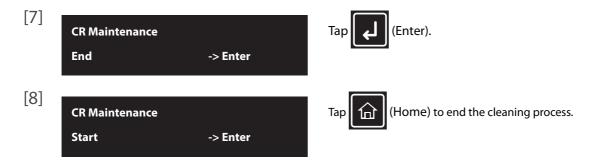



Used cleaning stick should be put in a plastic bag, etc, and dispose of it in compliance with local ordinance and instructions of local authorities.

Cleaning around the print head

Cleaning period:

- When print blurring and dot missing remain after head cleaning is done.
- When smears partially appears on the prints.


Preparation:

· Cleaning stick



During cleaning, please note the followings.

- Use a dry cleaning stick. A damp stick can cause damage to the print head.
- Do not touch the tip of a cleaning stick with fingers. Skin oil will damage the print head.
- Do not reuse a cleaning stick. Dust on the stick will damage the print head.
- This cleaning takes about 5 minutes. If it takes longer, the stick will get dry causing damage to the print head.
- Put the printer into the CR maintenance mode. [1]
 - **"Putting the printer into the CR maintenance mode" P. 138**
- [2] Open the front cover.




Open the maintenance cover on the left side.

[4] Use the cleaning stick to remove the ink deposits or dust on the bottom of the carriage.




- Print head guide (black plastic part)

 «Clean the space between the print head guide and bottom of the carriage.

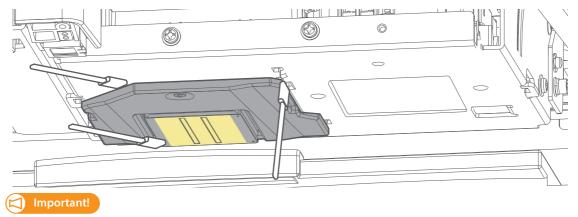

If it is hard to remove the stain, perform "Short" Head cleaning, and then clean again.



Close the maintenance cover.

[6] Close the front cover.





 $Used\ cleaning\ stick\ should\ be\ put\ in\ a\ plastic\ bag,\ etc,\ and\ dispose\ of\ it\ in\ compliance\ with\ local\ ordinance\ and\ instructions\ of\ local\ authorities.$

Cleaning the color sensor

Cleaning period:

• If you repeatedly failed to perform an auto print quality calibration ("Adjust Print 1: Auto").


Preparation:

- · Cleaning stick
- Ethanol (commercially available item: Use one with a concentration of 50% or higher.)




During cleaning, please note the followings.


- Do not push the glass on the color sensor too hard with a cleaning stick. This will damage the glass.
- Do not reuse a cleaning stick. Dust may adhere to the color sensor causing malfunction.
- This cleaning takes about 5 minutes. If it takes longer, the stick will get dry causing damage to the print head.
- Put the printer into the CR maintenance mode. [1]
 - Tutting the printer into the CR maintenance mode" P. 138
- [2] Open the front cover.



Open the maintenance cover on the left side.

Using a cleaning stick slightly dampened with ethanol, gently clean the glass on the color sensor located at the bottom [4] of the carriage to remove ink and dust.



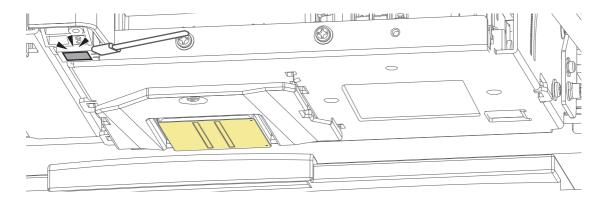

[5]

Close the maintenance cover.

[6] Close the front cover.





If the problem still persists, contact your local MUTOH dealer or MUTOH customer support.



Used cleaning stick should be put in a plastic bag, etc, and dispose of it in compliance with local ordinance and instructions of local authorities.

Inside cleaning

Cleaning period:

- · Monthly
- · When dust or ink stains are visible

Preparation:

- · Soft brush
- · Paper towel or Soft cloth
- Ethanol (commercially available item: Use one with a concentration of 50% or higher.)
- Gloves

A CAUTION



Unplug the power cable with the power OFF, before cleaning the inside of the printer.


Steps

- Remove the media. [1]
- Make sure that the printer is turned OFF. [2]
- Open the front cover. [3]



Immediately after turning off the power, the temperature of the heater in this product is very high. Touch the platen or media guide and if it is too hot, allow it to cool before cleaning.

[4]




Brush off dusts on the pressure rollers with a soft brush.



Do not blow off dusts inside the product with a gas duster. Dust can attach to moving parts, causing abnormal sound or malfunctions.

[5]



Use a soft cloth or paper towel slightly dampened with ethanol to clean off the ink on the platen, media guide and edge holders.

Important!

Wear protective gloves while cleaning.

Close the front cover. [6]

Replacing consumable parts

Replacing absorption material for the flushing box

The flushing box is a part that keeps receiving ink discharged from the print head. Please replace the absorption material for the flushing box periodically. If used without replacing, it can cause damage to the print head.

Replacing period:

• When there are lumps of ink rise from the frame of the flushing box (Approx. every two months).


*Since it differs depending on usage frequency, please check periodically.

Preparation:


- · Absorption material for the flushing box
- Paper you can get dirty (paper which ink will not bleed through)

1. Checking steps

[1] Open the front cover.




Open the maintenance cover on the right side.



Check the absorption material for the flushing box.

• When there are lumps of ink rise from the frame of the flushing box, it is time to replace.




Close the maintenance cover.

[5] Close the front cover.

2. Replacing steps

Open the front cover. [1]




Open the maintenance cover on the right side.

Cover the platen with the paper you can get dirty. [3]

Important!

Ink may drip from the absorption material for the flushing box. We recommend covering the floor with paper as well.



Pull the tab up of the absorption material for the flushing box, and release the hook.

Then remove the absorption material for the flushing box.




When removing the absorption material for the flushing box, be cautious of ink drops.




Used absorption material for the flushing box should be put in a plastic bag, etc, and dispose of it in compliance with local ordinance and instructions of local authorities.

Attach new absorption material for the flushing box.



Close the maintenance cover.



Close the front cover. [7]

Replacing Cutter

Replacing period:

- When the media is not cut smoothly
- When the cut surface is feathered, etc

Preparation:

· Cutter replacement blade




A CAUTION




- Do not push the knob of cutter or release suddenly. Because there is a spring under the cutter, the cutter can jump out.
- · Do not touch the cutter blade. It may cause injury.

Steps

- Put the printer into the CR maintenance mode. [1]
 - **"Putting the printer into the CR maintenance mode" P. 138**
- [2] Open the front cover.



Open the maintenance cover on the left side.



Press the cutter cap lightly, turn Cutter holder in the direction as illustrated below.




Do not push down the cutter cap. It may damage the part.

[5]


Remove the Cutter.




Used Cutter should be put in a plastic bag, etc, and dispose of it in compliance with local ordinance and instructions of local authorities.



Attach a new cutter.



Press the cutter cap lightly, return Cutter holder to its initial position.




Close the maintenance cover.

[9] Close the front cover.







Tap (Home) to end the cleaning process.

Replacing the cleaning wiper

The cleaning wiper is an essential part to make printing consistent. Please replace it periodically.

Replacing period:

· Approx. every twelve months

Preparation

- · Polyethylene gloves, glasses, mask
- · Absorption material for the flushing box
- Paper you can get dirty (paper which ink will not bleed through)





Wear the protective gloves • glasses • mask and avoid contact with your eyes or skin.

Eye or skin contact may cause slight irritation or bloodshot eyes. If in eyes or on skin, immediately flush with water. If irritation is present, seek medical advice/attention immediately.




Depending on the head height of the printer, two types of cleaning wipers are available; black and grey.
If the head height is set to Low1, Low2 or Middle, use a black wiper (normal type).
If set to High, use a grey wiper (for head height High).

You will not be able to perform cleaning properly if wrong type is used on the printer.


Thanging the Head Height" P. 45

• This product is shipped with a black wiper attached.





- [1] Put the printer into the CR maintenance mode.
 - "Putting the printer into the CR maintenance mode" P. 138
- [2] Open the front cover.




Open the maintenance cover on the right side.

[4] Cover the platen with the paper you can get dirty.



Ink may drip from the cleaning wiper. We recommend covering the floor with paper as well.



Remove the cleaning wiper.

- Slide the hook on the wiper to the back to unhook from the wiper slot.
- Lift the hook and remove the cleaning wiper.

Important!

- Wear protective gloves while replacing.
- When removing the cleaning wiper, be cautious of ink drops.



Used cleaning wiper should be put in a plastic bag, etc, and dispose of it in compliance with local ordinance and instructions of local authorities.

[6]

Follow the steps below to install new cleaning wiper.

- Slide the front side of the new cleaning wiper into its slot.
- Press the wiper hook down until it clicks into place.

Important!

Do NOT touch the cleaning wiper rubber with your bare hand. If finger oil gets on the rubber, it will damage the print head.

[7]

Close the maintenance cover.

[8] Close the front cover.







Tap (Home) to end the cleaning process.

Moving or transporting the printer

This section describes how to move or transport the printer.

Moving the printer


This section describes how to move the printer.



- When moving the printer, make sure to maintain a horizontal position.
- Do not tilt, set against something or place this product upside down. Otherwise the ink may leak or the handling mentioned above may cause abnormality.

1. Preparation before moving

- [1] Make sure that the printer is turned OFF.
- [2] Dispose of waste fluid.
 - **"Emptying waste ink tank" P. 133**
- [3] Remove all the cables, such as Power cord set.



Loosen the four adjusters of Stand as shown in the left.

Move the printer. [5]

2. Reinstalling

- Select a suitable place for installation. [1]
 - Startup Guide
- Move and install the printer to the location. [2]
- Attach Cables, such as Power cord set. [3]
- Perform Nozzle check, and then confirm that there is no clogging in Print head. [4]
 - **™ "Nozzle check F steps" P. 35**
- Perform print quality adjustment. [5]
 - **☞** "Print quality calibration steps" P. 39

Transporting the printer

When transporting the printer, make sure to pack it in the same condition as purchased, using protective and packing materials to protect the printer from vibration and shocks.




When transporting the printer, consult the MUTOH product dealer at your point of purchase.

Long-term storage

If not using the printer for a long time, execute [Longstore].

Preparation:

- · Cleaning bag: 4
- [1] Empty the waste ink tank.

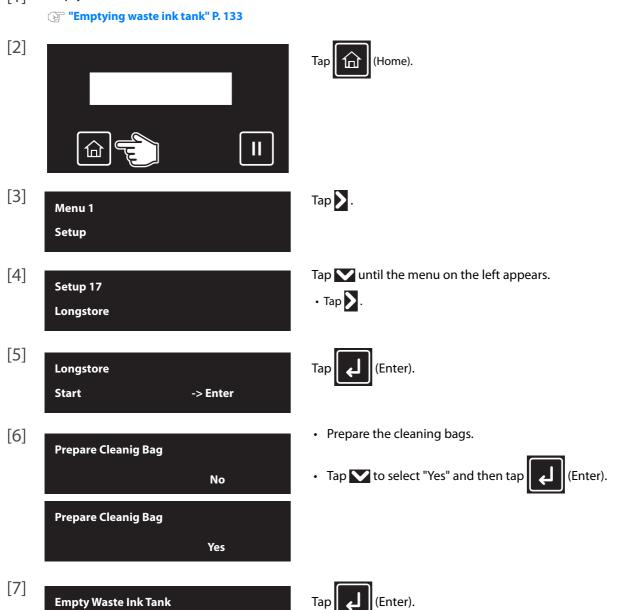



-> Enter

Check the waste ink tank.

- When the waste ink tank is not empty: Empty the waste ink tank.
- **☞ "Emptying waste ink tank" P. 133**
- When the waste ink tank is empty: Use 🔀 to select "Yes" and then tap




[9]

Remove Bags

The message on the left will appear.

- [10] Remove all ink bag cases and S/C cards.
 - Store the ink bag together with the corresponding S/C card.

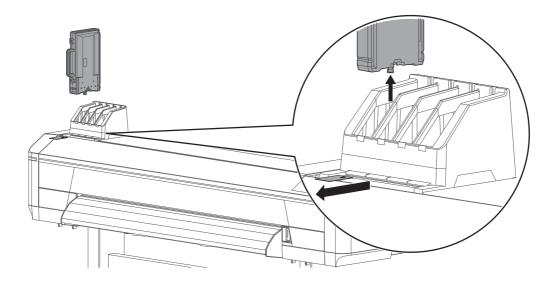

Discharging


The message on the left will appear.

• Ink discharging begins.

Insert Cleaning Bags

When the discharge is complete, the message to the left is displayed.

[11]




Unlock four latches and open the ink bag case.


| Important

Try not to apply excessive force to unlock them. This will cause damage to the latch.

[12]



Put the cleaning bag into the case.






When installing 1,000 ml / 2,200 ml ink bag cases:

• Always lock the divider plate.

[13]




Close the ink bag case.

Important!

Make sure the spout of cleaning bag is properly fitted into the groove in

If not fitted, the printer cannot correctly detect cleaning bag.




Close all the latches $(\times 4)$ of the case properly.

Important!

Check that all the latches (×4) are closed. If not, it may cause cleaner spillage.

- Insert the ink bag cases with cleaning bags and S/C cards into each slot. [14]
 - Face the latch side toward you and insert the case into each slot.
 - Make sure that they are fully inserted.

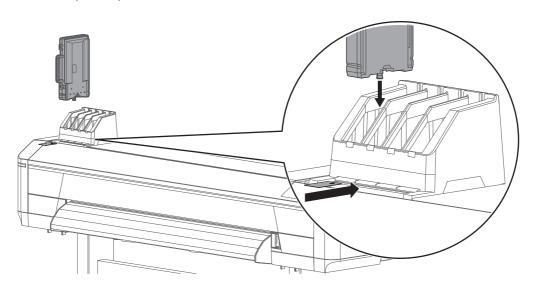

Washing Head


The message on the left will appear.

• Charging of the cleaner begins.

Remove Bags

When charging of the cleaner is complete, the message to the left is displayed.

[15] Remove all ink bag cases and S/C cards.

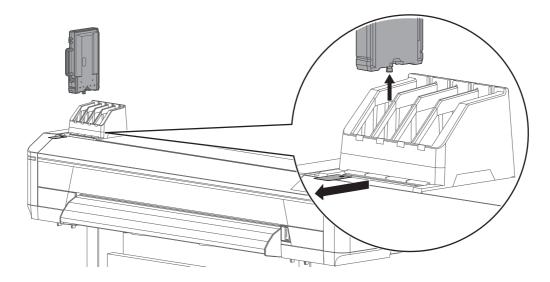

Washing Head


The message on the left will appear.

· Cleaner discharging begins.

Insert Cleaning Bags

When the discharge is complete, the message to the left is displayed.

- $[16] \quad Insert the ink bag cases with cleaning bags and S/C cards into each slot. \\$
 - Face the latch side toward you and insert the case into each slot.
 - Make sure that they are fully inserted.

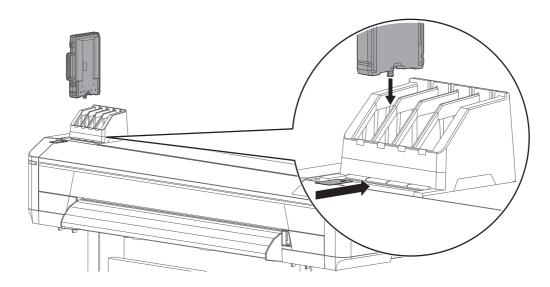

Washing Head


The message on the left will appear.

• Charging of the cleaner begins.

Remove Bags

When charging of the cleaner is complete, the message to the left is displayed.

[17] Remove all ink bag cases and S/C cards.

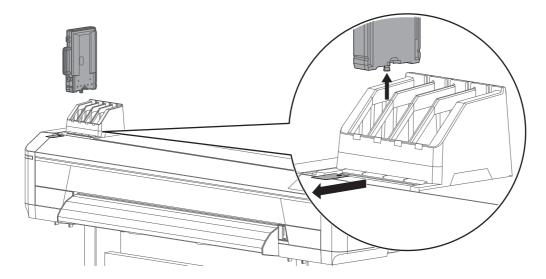

Washing Head


The message on the left will appear.

• Cleaner discharging begins.

[ALL] Discharged

When discharging is complete, the message to the left is displayed.

[18]




Long press the Power button.

- This product starts its powering off operations.
- When the message "Power Off" appears on the panel, release the Power button.
- The Power LED lights off.

Performing initial charging after head cleaning

[1]



Long press the Power button.

- The Power LED (above the Power button) lights up.
- This product starts its initialization operations.



Once the Power LED lights up, release the Power button.

[2]
Ink Charge
Start -> Enter

When the message to the left is displayed, tap



[3] Wash Retry?

When the message to the left is displayed, tap





If you need to perform a head cleaning and "Wash retry? No" is displayed, tap the key to change the display to "Wash retry? Yes" and tap [Enter]. After that, follow the instructions displayed on the front panel.

When cleaning is complete, "Insert Ink Bags" is displayed. Proceed to step 4 in this section.

Insert Ink Bags

The message on the left will appear.

[4] 3 sec.

3 sec.

Make sure you agitate the ink bag after you prepare it.

- Face the ink spout side upwards for 3 seconds.
- Invert it and count for 3 seconds.
- Repeat that 3 times.



Be sure to use new ink bags. If a half-used ink bag does not have enough ink, it will run out of ink during initial ink charging and will consume more ink.


[5]

Unlock four latches and open the ink bag case.




Try not to apply excessive force to unlock them. This will cause damage to the latch.

[6]



Put the ink bag into the case.






When installing 1,000 ml / 2,200 ml ink bag cases:

- If you are using 2L ink bag, release the lock of divider plate in the case, and then put the ink bag into the case.
- If you are using 1L ink bag, always lock the divider plate.


[7]



Close the ink bag case.

Make sure the spout of ink bag is properly fitted into the groove in the

If not fitted, the printer cannot correctly detect ink bag.




Close all the latches $(\times 4)$ of the case properly.

Important!

Check that all the latches (×4) are closed. If not, it may cause ink spillage.

- Insert the ink bag cases and S/C cards into each slot. [8]
 - Match the colors of the ink color indicating label on the printer and the label on the ink bag.
 - Face the latch side toward you and insert the case into each slot.
 - Make sure that they are fully inserted.

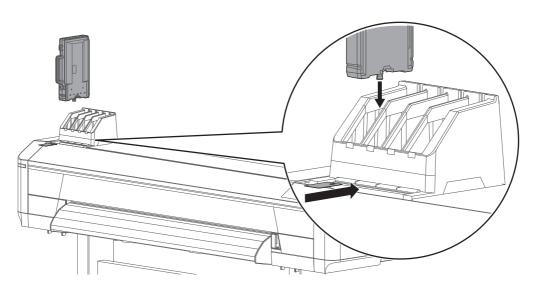

Ink Refill **%

The message on the left will appear.

• Ink charging begins.





During ink charging, make sure:

- Not to turn OFF the printer.
- Not to unplug the power cable of the printer.
- Not to open the front cover.
- Not to open the maintenance cover.
- Not to release the pressure rollers.



When ink charging is complete, the message to the left is displayed.



If the printer perform the nozzle check printing immediately after the initial ink charge is complete, the following results may occur.

- Printed lines become blurred.
- The data is partially not printed.

In such cases, follow "Menu 3: Cleaning" P. 108 and perform "Little Charge". Then, check the print result.

If there is no improvement in the print result even after performing "Little Charge", leave the printer unused for an hour or more. Then perform "Little Charge" again and check the print result.

If there is still no improvement, contact your local MUTOH dealer.

Chapter 4 Appendix

Messages and Error Messages	166
Status messages	166
Error message display and remedies	168
Error requiring restart	172
Froubleshooting	173
Installation and initial setup troubleshooting	173
Boot-up troubleshooting	174
Media-related troubleshooting	175
Printing-related troubleshooting	177
The media is jammed	180
Specifications of this product	183
List of specifications	183
Options / Supply list	186
Revision History	187

Messages and Error Messages

This section describes messages displayed during normal printer operation or when errors occur, and solutions to the messages.

Status messages

This section describes messages displayed during printer normal operation.

When the product is operating correctly, each operation status is displayed on the front panel as below.

Display	Description
Ready to Print PG: Low1 W: XXXX mm	Standby (Media is loaded).
Media End	Standby (Media is not loaded).
PG: Low1	TLoading a roll media" P. 25
Receiving PG: Low1 W: XXXX mm	Receiving data.
Converting PG: Low1 W: XXXX mm	Analyzing data.
Printing PG: Low1 W: XXXX mm	Under printing.
Remain: XXX.Xm	Displays the length of the data that has not been printed in meters for the data currently being printed.
Remain Time: XXX.Xmin	Displays the time remaining to print in minutes for the data currently being printed.
Media Remain: XXX m	Displays the remaining length of the media currently set in meters.
Pausing Print Cancel Print -> Enter	Pausing printing. • Tap (Cancel) to resume printing. • Tap (Enter) to cancel the print job.
Warming Up	Warming up Heater.
Warming Up Skip -> Enter	Received the printing data while Heater is warming up. To start printing before Heater is warmed up, press the (Enter) key.
Cleaning **%	Cleaning. Please wait a while.
Auto nozzle checking	When the optional drop sensor unit is installed: Auto Nozzle Checking. Please wait a while.
Ink Refill **%	Charging the ink. Please wait a while.
SubTank Refill **%	Charging the subtank. Please wait a while.

Display	Description
Busy-Washing	Initial charging, ejecting filler fluid.Washing the print head by cleaning fluid.Please wait a while.
During discharge	Flushing ink from the print head in the head cleaning process. Please wait a while.
User: Type ** OK?	Initializing the media.
Media Initial	Please wait a while. (** represents the set User type.)
Move To Origin Position	The print head is moving to the print start position to check the print origin Please wait a while.
Confirm Position	The print head has moved to the print start position. If it shows the intended
End -> Enter	position, tap (Enter).
Power Off	Turning OFF the printer. Wait for a while.
Insert Ink Bags	Charging the ink. Insert ink bag cases.
Insert Cleaning Bags	Washing Print head. Install cleaning bags.
Remove Bags	Washing Print head or discharging ink. Remove ink bag cases.
S/C Reading	Reading the S/C card.
*** Remote Mode *** End -> Enter	The remote panel mode is running, via MSM or similar. In the remote panel mode, operations via the front panel are not possible. To terminate the
	remote panel mode, press the (Enter) key for more than two seconds.
Roll Remain Error	The remaining roll paper count has become 0. (Printing stops)
Roll Near End: *m	The remaining roll paper count is almost 0. The remaining roll paper is * m.
Life Times [Pump]	The operational life of the pump motor has almost expired.
OK -> Enter	(Continues operation) Contact your local MUTOH dealer.
Life Times [CR Motor] OK -> Enter	The operation life CR motor has almost expired. (Continues operation)
	Contact your local MUTOH dealer.
Life Times [PF Motor]	The operational life of the PF motor has almost expired. (Continues operation)
OK -> Enter	Contact your local MUTOH dealer.

Error message display and remedies

This section describes error messages and remedies.

Error messages are displayed when certain failures occur during printer operation.

If an error that can be displayed occurs, the printer may display the following error messages on the front panel and stop operation.

Display	Description
Cover Open	Any or all of covers (front cover, maintenance cover right, maintenance coveres) left) are open.
	Close the cover.
Put Lever Back	The pressure rollers is released. Lower the pressure rollers.
Hold Media	The media is not loaded.
	Load the media.
	"Loading a roll media" P. 25
Undefined Media	Media detection has failed. (Stops operation)
	Reload the media.
Media Slant	Media is fed obliquely. (Stops operation)
	Reload the media.
Media Cut Error	The media was not cut. (Stops operation)
Change Head Gap ***	The head height on the printer does not match with the one specified on the
PG: *** W: ****mm	print data.
	Printhead Height" P. 43
End Of Roll	The Media has run out. (Stops operation)
	Load a new media.
[****] Ink End	Ink has run out. (Stops operation)
	Replace with a new ink bag.
	Replacing ink bag" P. 130
[****] No Bag	Ink bag case is not inserted. (Stops operation)
	Insert Ink bag case.
[****] No S/C Card	S/C card is not inserted. (Stops operation) Insert S/C card.
[****] S/C Ink Low	Slot * ink is low. Get a replacement bag ready.
[****] <i>C (C</i>	
[****] S/C Ink End	Ink has run out. (Stops operation) Replace with a new ink bag.
	(Fig. 130) "Replacing ink bag" P. 130
[****] Discharged	Ink is not filled.
[]Districtinged	Perform initial ink charging.
	"Performing initial charging after head cleaning" P. 162
Full WastelnkTank	The waste ink tank is full. (Stops operation)
	Immediately empty the tank.
	Emptying waste ink tank" P. 133
[****] S/C ReadErr	Reading S/C Card has been failed.
[****] S/C ReadErr	Reading S/C Card has been failed. Insert S/C Card again.

Display	Description
[****] S/C Col.Err	Ink bag cases are inserted in wrong slots. Insert ink bag cases correctly again.
[****] S/C Ink Err	The ink bag cannot be used for this printer. Contact your local MUTOH dealer.
[****] S/C CodeErr	Inserted ink bag is not a proper one. Contact your local MUTOH dealer.
[****] Broken Chip	S/C Card has been broken. Insert new ink bag.
Cannnot Operate Outside Print Area	The printer is unable to print because there is not enough printable width on the media. Adjust printable width by changing CR origin and side margin (left and right
	side margin) settings. "Setup 5: Media Width" P. 87, "Setup 8: Origin" P. 90, "Setup 3: Side Margin" P. 86
	Printable width needed varies depending on the types of test print. Adjust the above settings to secure enough width.
	"**>2: Adjust Print" P. 72 (at least 550 mm)
	"**>3: PF Adjust" P. 78 (at least 400 mm)
	"Roll Length Manage1: Print" P. 117, "Roll Length Manage2: Simple Print" P. 117 (at least 400 mm)
Cannnot Operate Media Initial - Off	The printer is unable to display the "Roll Length Manage" menu because Media Initial is set to "Off".
	"Setup 4: Media Initial" P. 87 Switch Media Initial to "Top&Width" or "Width" and then select "Menu 9 Roll Length Manage".
	"Menu9: Roll Length Manage" P. 116
Cannnot Operate No Media	The media is not loaded. Load the media.
	□ "Loading a roll media" P. 25
Cannnot Operate	The printer is unable to print because the "Roll Length" setting is set to "Off".
Roll Length - Off	Roll Length Manage4: Roll Length" P. 119
	Specify the "Roll Length" settings and then select Print or Simple Print.
	"Roll Length Manage1: Print" P. 117, "Roll Length Manage2: Simple Print" P. 117
Cannnot Operate	The printer is unable to scan because Output Mode is set to "Take Up".
Output Mode - Take Up	"Setup 6: Output Mode" P. 88
	Switch Output Mode to "Off" and then select the Scan menu.
	(Fig. 1) "Roll Length Manage3: Scan" P. 118
Drop Sensor Failed Auto NozzleCheck Off	When the optional drop sensor unit is installed: Due to the drop sensor unit failure, the auto nozzle check function was switched to "Off".
	"Setup 30: Auto Nozzle Check (Requiring the optional drop sensor unit)" P. 102
	Contact your local MUTOH dealer.

Display	Description
Auto Nozzle Check Nozzle Clog Present	When the optional drop sensor unit is installed: The printer run an auto cleaning cycle to recover blocked nozzles that an auto nozzle check detected, but the nozzles are still clogged.
	"Setup 30: Auto Nozzle Check (Requiring the optional drop sensor unit)" P. 102
	Tapping (Enter) key will clear the message.
	Manually run a nozzle check and cleaning cycles.
	™ Nozzle check" P. 35, "Cleaning" P. 37
Temperature too low	Printer's temperature is too low. Adjust room temperature. Wait until the warning message is no longer displayed. "Specifications of this product" P. 183
Temperature too high	Printer's temperature is too high. Adjust room temperature. Wait until the warning message is no longer displayed. Specifications of this product" P. 183



- "***" in the message "Change Head Gap ***" represents the head height (High, Middle, Low2, or Low1).
- $\ [****]$ in the error message indicates the target ink cartridge slot.
- If "Ink End" or "No S/C Card" and "No Bag" occur at the same time, "No Bag" message has priority to be displayed.

Smartchip recovery

When the following message is prompted on the operation panel, a smartchip error such as broken chip may have occurred in the S/C card.

Check that the correct color is inserted in the cartridge slot and perform smartchip recovery.

This will allow you to continue to print.

To perform smartchip recovery, do one of the followings according to the message appeared.

Display	Description
[****] S/C Recog. E	The S/C card that needs smartchip recovery may have been installed. Remove the S/C card and insert it again. If the printer is still unable to read it, insert a new S/C card. • If a message "[**] Check Color OK ->Enter" appears after the S/C card is reinserted, follow the message "[**] Check Color OK ->Enter" to operate.
[**] Check Color OK ->Enter	The S/C card that needs smartchip recovery may have been installed. Check that the ink color of the S/C card inserted is correct. In case of wrong color insertion, insert a correct S/C card. If color is correct, tap (Enter). The printer will perform smart chip recovery and will continue to print.
[*] Chg. S/C Card	The ink bag that smartchip recovery was performed has run out of ink. Replace with a new S/C card.



- $\bullet~\ [*]$ in the error message indicates the target ink cartridge slot.
- During smartchip recovery execution, the ink cartridge being recovered blinks in the ink status menu.

"Ink Status" P. 110

Error requiring restart

An error requiring restart is displayed if a fatal operational failure such as the following occurs.

- · When an obstacle that prevents printing occurs.
- When a problem occurs with the electrical circuit (PCB, motor, sensor, etc.) of the printer.
- · When a failure in the printer control program occurs.

If an error requiring restart occurs, the printer stops operating after performing the following operations.

- 1. The drive power automatically shuts down.
- 2. All lamps on the front panel blink, and the buzzer rings continuously.
- 3. The error message is displayed on the front panel.

Pressing any key on the front panel stops the beeping.

For an error requiring restart, operation will return to normal after removing the cause of the error and restarting the printer. If the same error continues to be displayed, contact the your local MUTOH dealer.

Be sure to tell us the code no. of the error message when you contact us.

Display	Description
E***Err []	A problem that does not have a remedy has occurred.
	 Remove obstacles such as paper scraps in the drive system.
	Confirm that the replaced items are correctly attached.
	3. Turn the power button off. Wait a short while, then turn the power
	button on, to restart the printer.



When an error requiring reboot occurs, the printer cannot be turned off from the setup menu in the control panel. Press the power button for more than 2 seconds to turn off the printer.



- "***" in the error message is the code no. that indicates what type of error occurred.
- The command code representing the error occurred may be indicated in [].

Troubleshooting

This section describes undisplayed malfunctions and failures of the printer, possible causes and countermeasures.



- The current status and error information of your printer can be checked from the Printer Status tab > Status Information on MSM. If your printer is not operating correctly, check this Status Information first.
- Make sure to use the latest version of MSM. To check the latest available version, go to Help > Version > Check for updates on MSM. If old version is installed in your computer, download the latest version from MUTOH Club.
- MUTOH Status Monitor Operation Manual

Installation and initial setup troubleshooting

Description	Possible cause and Remedy
	Is the front cover, or the maintenance cover open? • Close the front cover, or the maintenance cover.
Cannot perform the initial inkcharging.	Is the media loading lever raised? • Lower the media loading lever.
	Are ink bag cases and S/C cards inserted all the way into the printer? • Make sure ink bag cases and S/C cards are all inserted properly. Installing the ink bag" P. 131
Ink does not come out afterink charging.	Is the ink bag too cold? • Leave the ink bag at room temperature for at least three hours, and perform cleaning several times. ———————————————————————————————————
	Is the power turned OFF during ink charging? • Turn the power ON again and continue ink charging.
Nozzle missing occurs afterinitial ink charging.	Did you perform head cleaning? • Perform cleaning, then, check the print result. "Head cleaning" P. 135 • If there is no improvement in the print result even after performing cleaning, leave the printer unused for an hour or more. Then perform cleaning or "Little Charge" again and check the print result. • If the problem still persists, contact your local Mutoh dealer.
MSM or RIP cannot access tothe printer.	Is Ethernet cable connected correctly? • Securely connect the Ethernet cable to the Ethernet Port. Are the network settings configured correctly? • Configure the network settings correctly.
	Do the printer's network settings match the computer's settings? • Match this product's network settings with the computer side environment. © "Connecting to a Computer" P. 13, "Setup 20: IP Address" P. 96, "Setup 21: Subnet Mask" P. 96, "Setup 22: Gateway" P. 97

Boot-up troubleshooting

Symptom	Possible cause and Remedy
	Is the power cable connected to the plug?
	Connect the power cable.
	Does the AC power supply provide the specified voltage?
	Connect the cable to another outlet.
	Is the front cover, or the maintenance cover open?
	Close the front cover, or the maintenance cover.
	Is the pressure rollers released?
	Lock the pressure rollers.
Does not work at allafter power	Is the media loaded correctly?
	Load the media correctly.
activation /after loading the media.	
	Is the ink bag case inserted?
	Insert the ink bag case.
	Do you use the printer within recommended environmental conditions?
	Make sure to use the printer within the specification range.
	(Fig. 4) "Ensuring a suitable place for installation" of the "Startup Guide"
	Is there any error message displayed on MSM?
	Go to the Printer Status tab in MSM and check that if any error message is displayed in the Status Information.

Media-related troubleshooting

Is the media loaded correctly? • Load the media correctly. "Loading a roll media" P. 25 Are there any foreign materials such as torn paper attached to Pressure rollers?	Symptom	Possible cause and Remedy
"Inside cleaning" P. 147 Do you use the printer within recommended environmental conditions? • Make sure to use the printer within the specification range. "Ensuring a suitable place for installation" of the "Startup Guide" Are any curls or warps present on your media? • Set the edge holder at both edges of the media. • Check that you select the appropriate vacuum fan setting. "After loading the media" P. 32, "**>7: Vacuum Fan" P. 84 Are you using creased, damaged, torn or curled media? • Replace the media. Is holddown pressure adequate for the roll media?	The media slips, is torn /crumpled during	Is the media loaded correctly? Load the media correctly. "Loading a roll media" P. 25 Are there any foreign materials such as torn paper attached to Pressure rollers? Clean Pressure rollers. "Inside cleaning" P. 147 Do you use the printer within recommended environmental conditions? Make sure to use the printer within the specification range. "Ensuring a suitable place for installation" of the "Startup Guide" Are any curls or warps present on your media? Set the edge holder at both edges of the media. Check that you select the appropriate vacuum fan setting. "After loading the media" P. 32, "**>7: Vacuum Fan" P. 84 Are you using creased, damaged, torn or curled media? Replace the media. Is holddown pressure adequate for the roll media? Use the slide lock lever on the individual pressure rollers to reduce or cancel the pressure.



If the media is jammed or torn, remove it according to "The media is jammed" P. 180

Symptom	Possible cause and Remedy
	Is the media loaded correctly? • Load the media correctly. **TLoading a roll media" P. 25
The printer does not detectthe media.	 Is the media loaded at an angle? Load the media straight. "Loading a roll media" P. 25
	Do you use the printer within recommended environmental conditions? • Make sure to use the printer within the specification range. Ensuring a suitable place for installation" of the "Startup Guide"
	Did you load the media which has been printed before? • Use a new media.

Symptom	Possible cause and Remedy	
	Do you use the printer within recommended environmental conditions? Make sure to use the printer within the specification range. "Ensuring a suitable place for installation" of the "Startup Guide"	
Media jams frequently occur.	 Are any curls or warps present on your media? Set the edge holder at both edges of the media. Check that you select the appropriate vacuum fan setting. "After loading the media" P. 32, "**>7: Vacuum Fan" P. 84 	
	Are you using creased, damaged, torn or curled media? • Replace the media.	



If the media is jammed or torn, remove it according to "The media is jammed" P. 180

Symptom	Possible cause and Remedy
The media skews during printing.	Is the media loaded correctly? • Load the media correctly. © "Loading a roll media" P. 25

Printing-related troubleshooting

Symptom	Possible cause and Remedy	
The printer does not print.	Is Ethernet cable connected correctly? • Securely connect the Ethernet cable to the Ethernet Port. © "Connecting to a Computer" P. 13	
The printer does not print.	Is there any error message displayed on MSM? • Go to the Printer Status tab in MSM and check that if any error message is displayed in the Status Information.	
The carriage pauses at either side of the printerwhile printing.	 Does your computer meets the following requirements? OS: Windows 11 CPU: Intel (R) Core (TM) i5 or more Memory: No less than 8G byte Network: Use a network port that supports Gigabit Ethernet, and an Ethernet cable that supports Category 6 Gigabit Ethernet or later. Note The OS support period of MUTOH software follows the Microsoft support lifecycle policies. When using RIP software, please also see the system requirements of your RIP software. 	
	Do you use a Gigabit Ethernet cable? • To connect your printer to your computer, use a Gigabit Ethernet cable Category 6 or later. "Connecting to a Computer" P. 13	
	Are any curls or warps present on your media? • Set the edge holder at both edges of the media. • Check that you select the appropriate vacuum fan setting. "After loading the media" P. 32, "**>7: Vacuum Fan" P. 84 Does the printer heater deform your media? • If the heater deforms the media loaded to the printer before printing, go to the	
Smears or missing area partially appears on the prints.	"Start Feed" menu to increase the media feeding amount. "Setup 25: Start Feed" P. 98 Does the media contain moisture or are you using the creased or wrinkled	
	media? • Replace it with the new media.	
	 Is there any dirt around the print head? Clean the circumference of the print head. "Cleaning around the print head" P. 143 	
The printing position is incorrect (some	Is the media loaded correctly? • Load the media correctly. **TLoading a roll media" P. 25	
parts of the media cannot be printed on).	Did you set up the origin? • Cancel or reset the settings of the origin. Setup 8: Origin" P. 90	

Symptom	Possible cause and Remedy	
	Is the media printed on the printing surface?	
	Check the printing surface of the media and set it correctly.	
Printing is blurred.	Did you perform Print quality adjustment?	
	Perform Print quality adjustment.	
	"**>2: Adjust Print" P. 72	
	Did you perform Media feed adjustment?	
	Perform Media feed adjustment.	
	₩ "**>3: PF Adjust" P. 78	
	Is the media loaded correctly?	
	Load the media correctly.	
	© "Loading a roll media" P. 25	
	Does the media contain moisture or are you using the creased or wrinkled	
White or black lines appeared printed	media?	
	Replace it with the new media.	
	Are Nozzles in good condition?	
White or black lines appearon printed	Perform Nozzle check.	
media.	Then if nozzle missing is found, conduct cleaning.	
	"Nozzle check and cleaning" P. 35	
	Did you perform Print quality adjustment?	
	Perform Print quality adjustment.	
	"**>2: Adjust Print" P. 72	
	Did you perform Media feed adjustment?	
	Perform Media feed adjustment.	
	"**>3: PF Adjust" P. 78	
	Are Nozzles in good condition?	
	Perform Nozzle check.	
	Then if nozzle missing is found, conduct cleaning.	
	"Nozzle check and cleaning" P. 35	
	Did you perform Print quality adjustment?	
Printing lines are not straight/ are	Perform Print quality adjustment.	
duplicated or patchy.	"**>2: Adjust Print" P. 72	
auplicated of patchy.	Did you perform Media feed adjustment?	
	Perform Media feed adjustment.	
	"**>3: PF Adjust" P. 78	
	Is Ink bag within the validity period?	
	Use a non-expired ink bag.	

Symptom	Possible cause and Remedy	
	Are Nozzles in good condition? • Perform Nozzle check. Then if nozzle missing is found, conduct cleaning. "Nozzle check and cleaning" P. 35	
Printed color is not accurate.	Did you install an ink bag on each ink pack case with correct ink color of S/C card?	
	 Check that the ink color written on S/C card matches the ink color of ink bag installed on each ink pack case. If it does not match, perform "Longstore" to clean the print head and then perform initial ink charging. 	
	Is there any ink stains or deposits on the cleaning wiper or circumference of the print head? • Clean the cleaning wiper and circumference of the print head. © "Cleaning of cleaning wiper" P. 138, "Cleaning around the print head"	
Nozzle missing remains after head cleaning.	P. 143 Do you use the appropriate type of cleaning wiper for the head height? See the following section for the appropriate combination. "Replacing with an appropriate cleaning wiper for the head height" P. 46	
	 Did you select an appropriate cleaning setting? Head Select: Select "ALL" or the print head which nozzle missing occurs. "Menu3: Cleaning" P. 108 Cleaning Mode: If nozzle missing still persists after attempting Normal Cleaning or Long Cleaning two or three times, perform "Little Charge". "Menu3: Cleaning" P. 108 Select Nozzle: If Little Charge does not recover the nozzles, go to Select Nozzle and select the nozzles that are firing properly. 	
Printed area does not dry completely.	Do you use the heaters of the printer? • Check the settings of heaters.	
	Did you select an appropriate print mode? • Check that the print mode is set to the appropriate mode. **The image is set to the appropriate mode. **The i	




- $\boldsymbol{\cdot}\,$ If an image contains high ink density area, the area may not dry easily.
- Depending on the media being used, printed area may not dry easily.

The media is jammed

When the media is jammed in the printer, follow the procedure below to remove it.


[1]



Long press the Power button.


- This product starts its powering off operations.
- When the message "Power Off" appears on the panel, release the Power button.
- The Power LED lights off.

[2]



Open the front cover.

[3]



Move the carriage from the top of the media to the right.


Important!

When the head height is set to Low1 or Low2, change it to High and then shift Head.

After shifting Head, change the setting back to Low1 or Low2.

"Printhead Height" P. 43

[4]




Slide the edge holder to the right to remove it from the media.

Important!


If any deformation is found on the media holder, stop using it and contact your local MUTOH dealer.

[5]




From the front side of the printer, pull the media feed lever towards you to release the pressure rollers.


Pull the media towards you and use a cutter to cut the torn part of the media along the groove.



[7] Rewind the media a little by rolling Flange on the media holder.

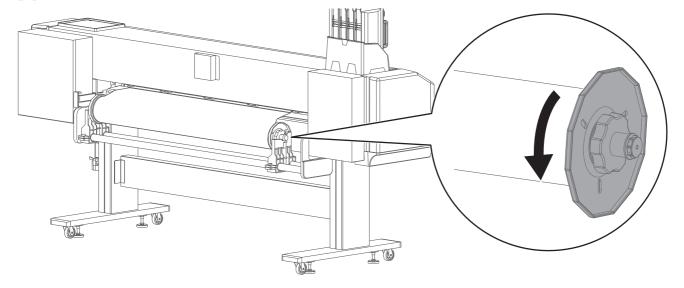

- $[8] \hspace{0.5cm} \textbf{If paper dust or pieces of paper remain inside the printer, remove them.} \\$
- [9] Turn the printer ON.
- [10] Load a roll media for Nozzle check.
 - "Loading a roll media" P. 25

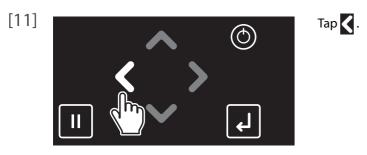

[12]





- The printer will print the nozzle check pattern.
- [13] Check the nozzle check print to see all nozzles are clear.
 - If you find missing or thin lines on the print, go to "Cleaning steps" P. 37.
 - If all lines are clearly printed, you can start printing.

Note

Specifications of this product

List of specifications

Model Name		XPJ-1641SR-P	
Print method		On demand piezo method	
Drive method		Firmware servo/DC motor drive	
Media feed method		Multipoint pressurizing Grid roller system	
Media hold down system		Pressure roller down system by manual lever	
Conditions of usable	Media outer diameter	Φ200 mm or less	
media —	Media core diameter	2 inches or 3 inches	
	Weight	30 kg or less	
_	Width 500 mm to 1,625 mm		
	Recommended media thickness	1.0 mm or less	
Maximum Printable Width		1,615 mm	
Maximum print length		1,500 m	
Head height adjustment		Four-level adjustment of Low1, Low2, Middle, and High	
Interface		Gb-Ethernet (1000BASE-T)	
Waste ink tank		2,000 ml tank is attached to the printer. Empty the tank when needed.	
Ink	Color	Black, Cyan, Magenta, Yellow	
	Туре	300 ml / 1,000 ml ink bag (Cleaner is 300ml)	

Environmental conditions	Printer Operation Environment	Temperature 20 to 32 °C Humidity 40 to 60%, No condensation Temperature 22 to 30 °C Humidity 40 to 60%, No condensation Temperature: No more than 2 °C per 1 hour Humidity: No more than 5% per 1 hour	
	Recommended Printing		
	Environment		
	Change rate		
	Printer Storage Environment	Storage without ink charging: up to 6 months Temperature -20 to +60 °C Humidity 20 to 80%, No condensation	
		Storage with ink charging: Up to 1 week Temperature -10 to 40 °C Humidity 20 to 80%, No condensation Storage up to 4 days maximum when stored between 32 °C to 40 °C. Black/Cyan/Magenta/Yellow (300 ml or 1,000 ml each) Temperature -20 to 40 °C Humidity 5 to 85%, No condensation Keep the product in a cool, dark and well ventilated area. Keep the product away from inflammable materials or heat source. Storage under 40°C should be within one month.	
	Ink Storage Environment		
		Cleaning bag (300 ml) Temperature -5 to 40 °C Humidity: up to 80%, No condensation Storage up to 6 months maximum when stored between -5 °C to 5 °C or 30 °C to 40 °C.	
Power supply	Printer:		
specifications	Voltage	AC 100V to 120V ±10% AC 200V to 240V ±10%	
	Frequency	50/ 60Hz ±1Hz	
	Current AC 100V to 120V AC 200V to 240V	9.0 A or below 6.0 A or below	
	Heater: Voltage	AC 100V to 120V ±10% AC 200V to 240V ±10%	
	Frequency	50/ 60Hz ±1Hz	

Power consumption	Power off	· Printer	
	AC 100V to 120V	1.0 W or below	
	AC 200V to 240V	3.8 W or below	
		· Heater	
	AC 100V to 120V	0.1 W or below	
	AC 200V to 240V	0.2 W or below	
	Standby		
	(Heater: OFF)		
	AC 100V to 120V	45 W or below	
	AC 200V to 240V	45 W or below	
	(Heater: ON)		
	AC 100V to 120V	1200 W or below	
	AC 200V to 240V	1200 W or below	
	Sleep Mode		
	AC 100V to 120V	30 W or below	
	AC 200V to 240V	30 W or below	
	Operation	· Printer	
	AC 100V to 120V	1100 W or below	
	AC 200V to 240V	1100 W or below	
		· Heater	
	AC 100V to 120V	1200 W or below	
	AC 200V to 240V	1200 W or below	
Dimensions	Height	1,428 mm	
	When installing 1,000 ml ink	1,611 mm	
	bag cases:		
	When installing 1,000 ml /	1,712 mm	
	2,200 ml ink bag cases:		
	Width	2,770 mm	
	Depth	895 mm	
Weight	Main body	141 kg	
	Stand	32 kg	

Options / Supply list

For more information about the options and the supply items, contact your local MUTOH dealer.



MUTOH strongly recommends to use genuine ink bags. This printer is designed to bring out the best performance when using with the MUTOH genuine ink. Non-MUTOH ink may cause print defects or damage to the printer.

Revision History

Date	Version	Manual code	Supported Firmware
2021.10	00	XPJ1641SRPE-A-00	V.1.00
2022.2	01	XPJ1641SRPE-A-01	V.1.01
2022.6	02	XPJ1641SRPE-A-02	V.1.03
2022.10	03	XPJ1641SRPE-A-03	V.1.04
2023.1	04	XPJ1641SRPE-A-04	V.1.05
2024.6	05	XPJ1641SRPE-A-05	V.1.08
2024.11	06	XPJ1641SRPE-A-06	V.1.10
2025.10	07	XPJ1641SRPE-A-07	V.1.11
2025.10	07a	XPJ1641SRPE-A-07a	V.1.11 or later

MUTOH