

VJ-1628TD/ 2628TD OPERATION MANUAL ERRATA

Some contents of the Operation Manual have been changed as follows.

TIP


- The contents of this document are based on the firmware version 2.00 or later.

Chapter	Item	Description	Rev. History
Chapter 3	Modified description "3.4 Installing ink cartridges"	Refer to sheet 2	02a
Chapter 4	Modified description "4.4.7 Selecting Ink Types"	Refer to sheet 3	02a
Chapter 5	Modified description "5.1.21 IP Address menu"	Refer to sheet 4	02a
	Modified description "5.1.22 Subnet Mask menu"	Refer to sheet 4	02a
	Modified description "5.1.21 Gateway menu"	Refer to sheet 5	02a
	Modified description "5.1.27 Ink Type menu"	Refer to sheet 6 to 7	02a
Appendix	Modified the descriptions in "Setup menu diagram"	Refer to sheet 8	02a

3.4 Installing ink cartridge

(Modified following description.)

5. Use the [+] key or [-] key on the operation panel to select the ink type.

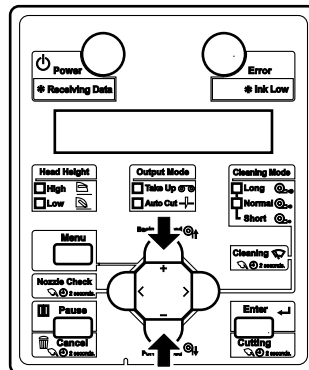

Ink types are as follows.


Ink Type	Display Name
Dye Transfer Sublimation Ink	VJ-DTSINK *
Direct Print Sublimation Ink	VJ-DPSINK *
Water Pigment Ink	RJ-FGINK
RJ80DS1 Ink	RJ80DS1
RJ80DD Ink	RJ80DD

* Use this setting when using genuine ink.

4.4.7 Selecting Ink Types

(Modified following description.)

4. Use the [+] key or [-] key on the operation panel to select the ink type.

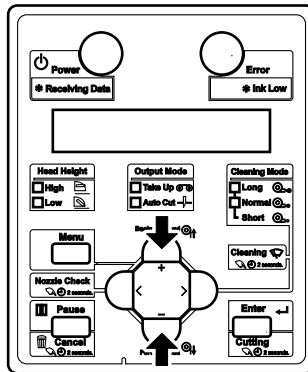

Ink types are as follows.

Ink Type	Display Name
Dye Transfer Sublimation Ink	VJ-DTSINK *
Direct Print Sublimation Ink	VJ-DPSINK *
Water Pigment Ink	RJ-FGINK
RJ80DS1 Ink	RJ80DS1
RJ80DD Ink	RJ80DD


* Use this setting when using genuine ink.

5.1.21 IP Address menu

Sets the IP address of the printer.

NOTE

- Be sure to set the IP address after consulting the network administrator.


Setup item	Setting	Description
IP Address	0.0.0.0 to <192.168.1.253> to 255.255.255.255	Change the IP address by operating the following keys. <ul style="list-style-type: none"> • [+] key: increases the setting value. • [-] key: decreases the setting value. • [Enter] key: changes the setting for the next segment.
	-	<ul style="list-style-type: none"> • [Cancel] key: saves the setting and shifts to the previous menu.  5.1 Setup menu

5.1.22 Subnet Mask menu

Sets the subnet mask of the printer.

NOTE

- Be sure to set the subnet mask after consulting the network administrator.


Setup item	Setting	Description
Subnet Mask	0.0.0.0 to <255.255.255.0> to 255.255.255.255	Change the IP address by operating the following keys. <ul style="list-style-type: none"> • [+] key: increases the setting value. • [-] key: decreases the setting value. • [Enter] key: changes the setting for the next segment.
	-	<ul style="list-style-type: none"> • [Cancel] key: saves the setting and shifts to the previous menu.  5.1 Setup menu

5.1.23 Gateway menu

Sets the gateway.

NOTE

- Be sure to set the gateway after consulting the network administrator.



Setup item	Setting	Description
Gateway	0.0.0.0 to <192.168.1.254> to 255.255.255.255	Change the IP address by operating the following keys. <ul style="list-style-type: none"> • [+] key: increases the setting value. • [-] key: decreases the setting value. • [Enter] key: changes the setting for the next segment.
	-	<ul style="list-style-type: none"> • [Cancel] key: saves the setting and shifts to the previous menu.  5.1 Setup menu

5.1.27 Ink Type Menu

This section describes the procedure to select the ink type to use.

The setup items differ depending on the ink set setting used.



5.1.27.1 8Color, 6Color, 4Color Double

Setup item	Setting	Description
Ink Type	<VJ-DTSINK *>	Select this when using Dye Transfer Sublimation Ink.
	VJ-DPSINK *	Select this when using Direct Print Sublimation Ink.
	RJ-FGINK	Select this when using Water Pigment Ink.
	RJ80DS1	Select this when using RJ80DS1 Ink.
	RJ80DD	Select this when using RJ80DD Ink.
	-	<ul style="list-style-type: none"> • [Enter] key: Saves the setting and shifts to the initial hierarchy.  5.1 Setup menu • [Cancel] key: Cancels the set value and shifts to the previous hierarchy.  5.1.27 Ink Type Menu

*Use this setting when using genuine ink.



5.1.27.2 4Color Single

(1) Head selection

Setup item	Setting	Description
Ink type	Head 1	Sets up the ink type of Head 1 (C-A, M-A, Y-A, K-A).
	Head 2	Sets up the ink type of Head 2 (C-B, M-B, Y-B, K-B).
	-	<ul style="list-style-type: none"> • [Enter] key: Saves the setting and shifts to the initial hierarchy.  5.1 Setup menu • [Cancel] key: Cancels the set value and shifts to the previous hierarchy.  5.1.27 Ink Type Menu

(2) Ink type selection

When using 4Color Single, the following is displayed after selecting Print head in Ink type menu.

Setup item	Setting	Description
Head 1 or Head 2	<VJ-DTSINK *>	Select this when using Dye Transfer Sublimation Ink.
	VJ-DPSINK *	Select this when using Direct Print Sublimation Ink.
	RJ-FGINK	Select this when using Water Pigment Ink.
	RJ80DS1	Select this when using RJ80DS1 Ink.
	RJ80DD	Select this when using RJ80DD Ink.
	-	<ul style="list-style-type: none"> • [Enter] key: Saves the setting and shifts to the initial hierarchy.  5.1 Setup menu • [Cancel] key: Cancels the set value and shifts to the previous hierarchy.  5.1.27 Ink Type Menu

*Use this setting when using genuine ink.

Setup menu diagram(Ready to Print) (3/4)

